

<p align="center">UTILITY PATENT APPLICATION TRANSMITTAL</p> <p><i>(Only for new nonprovisional applications under 37 CFR 1.53(b))</i></p>	<p>Attorney Docket No. 1341,1954 (JDH)</p>
	<p>First Named Inventor or Application Identifier:</p>
	<p>Express Mail Label No.</p>

<p align="center">APPLICATION ELEMENTS</p> <p><i>See MPEP chapter 600 concerning utility patent application contents.</i></p>	<p>ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231</p>		
<p>1. <input checked="" type="checkbox"/> Fee Transmittal Form</p> <p>2. <input checked="" type="checkbox"/> Specification, Claims & Abstract [Total Pages: <u>97</u>]</p> <p>3. <input checked="" type="checkbox"/> Drawing(s) (35 USC 113) [Total Sheets: <u>18</u>]</p> <p>4. <input checked="" type="checkbox"/> Oath or Declaration [Total Pages: <u>3</u>]</p> <p> a. <input checked="" type="checkbox"/> Newly executed (original or copy)</p> <p> b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)</p> <p> i. <input type="checkbox"/> DELETION OF INVENTOR(S)</p> <p> Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).</p> <p>5. <input type="checkbox"/> Incorporation by Reference (usable if Box 4b is checked)</p> <p> The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</p> <p>6. <input type="checkbox"/> Microfiche Computer Program (Appendix)</p> <p>7. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)</p> <p> a. <input type="checkbox"/> Computer Readable Copy</p> <p> b. <input type="checkbox"/> Paper Copy (identical to computer copy)</p> <p> c. <input type="checkbox"/> Statement verifying identity of above copies</p>			
<p align="center">ACCOMPANYING APPLICATION PARTS</p>			
<p>8. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s))</p> <p>9. <input type="checkbox"/> 37 CFR 3.73(b) Statement (when there is an assignee) <input type="checkbox"/> Power of Attorney</p> <p>10. <input type="checkbox"/> English Translation Document (if applicable)</p> <p>11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449[] Copies of IDS Citations</p> <p>12. <input type="checkbox"/> Preliminary Amendment</p> <p>13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)</p> <p>14. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, status still proper and desired.</p> <p>15. <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)</p> <p>16. <input type="checkbox"/> Other:</p>			
<p>17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:</p> <p><input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No: <u> </u></p>			
<p>18. CORRESPONDENCE ADDRESS</p>			
<table> <tr> <td> <p>STAAS & HALSEY LLP Attn: 700 Eleventh Street, N.W., Suite 500 Washington, DC 20001</p> </td> <td> <p>Telephone: (202) 434-1500 Facsimile: (202) 434-1501</p> </td> </tr> </table>		<p>STAAS & HALSEY LLP Attn: 700 Eleventh Street, N.W., Suite 500 Washington, DC 20001</p>	<p>Telephone: (202) 434-1500 Facsimile: (202) 434-1501</p>
<p>STAAS & HALSEY LLP Attn: 700 Eleventh Street, N.W., Suite 500 Washington, DC 20001</p>	<p>Telephone: (202) 434-1500 Facsimile: (202) 434-1501</p>		

PUSH SERVICE SYSTEM AND PUSH SERVICE PROCESSING METHOD

FIELD OF THE INVENTION

The present invention relates to a push service system
5 and a push service processing method for processing push service
in a network using IP (Internet protocol).

BACKGROUND OF THE INVENTION

In recent years, as computer technique and IP network have
10 developed, push service is widely provided in the Internet or
intranet. The push service transmits data of a host apparatus
in the network to a low-order apparatus of a user or the like
at timing different from that of a request from the low-order
apparatus. To transmit the data from the host apparatus to the
15 low-order apparatus when the low-order apparatus requests the
data from the host apparatus is called pull. In this push
service, it is important that data are distributed efficiently
and quickly, and realization of the push service which
distributes data efficiently and quickly is realized.

20 Most of the conventional push services are realized by
automatically accessing from a user terminal to a predetermined
type of information per constant time. That is, a function for
accessing to a data source including the predetermined
information per constant time is provided to the user terminal,
25 and update information of the data source is obtained from the

accessed results.

In another push services, user terminals are registered in a data source including various data, and when the data source is updated, the data source directly provides the updated data to the respective user terminals. In this case, the data source itself has the function for providing distribution service.

However, the conventional push services where the access is executed per constant time, since a check is made as to whether or not the information in the data source is updated in each access, there arises a problem that useless traffic on the network increase.

In addition, in this push service system, since free time intervals between the checks of the updated information in the data source exist, there arises a problem that emergent information such as news flash cannot be obtained immediately.

Meanwhile, in the conventional push service where the user terminals are registered in the respective data sources, since information about the user terminals is registered in the respective data sources, the respective data sources hold the information about the reduplicate user terminals. As a result, a lot of resources are required so that the resources cannot be used effectively, and flexible expandability to the push service system cannot be expected.

25 SUMMARY OF THE INVENTION

It is an object of the present invention to provide a push service system and a push service processing method in which resources in a network are utilized efficiently without increasing traffic on the network, and information required by
5 users can be obtained quickly and expandability is high.

According to one aspect of this invention, a plurality of user terminals transmit information of the user terminals and requested various information to some of not less than one agents so as to execute the registration process. A plurality
10 of data servers have various information and post information about updating of various information to the agents. When the posted information about updating is the information about updating which is requested by the registered user terminals, the not less than one agents post the information about updating
15 to the registered user terminals. The user terminals which have received the post access directly to the data servers which hold contents of the updated information via the network based on the posted information about updating, and obtain the contents of the updated information.

20 According to another aspect of this invention, a plurality of user terminals transmit information of the user terminals and requested various information to some of not less than one agents so as to execute the registration process. A plurality of data servers have various information and post
25 information about updating of various information to the agents.

When the posted information about updating is the information about updating which is requested by the registered user terminals, the not less than one agents access to the data servers which have posted the information about updating via
5 the network, and obtain contents of the updated information, and post the contents of the updated information to the registered user terminals via the network. The user terminals which have received the post receive the posted contents of the updated information, and obtain the contents of the updated
10 information.

According to still another aspect of this invention, a plurality of user terminals transmit information of the user terminals and requested various information to some of not less than one agents so as to execute the registration process. A
15 plurality of data servers have various information and post information about updating of various information to the agents. When posted contents of the updated information is the information about updating which is requested by the registered user terminals, the not less than one agents post the contents
20 of the updated information to the registered user terminals via the network. The user terminals which have received the post receive the posted contents of the updated information and obtain it.

Further, a plurality of user terminals transmit
25 information of the user terminals and requested various

information to some of the plurality of agents in the subnetwork connected to the network so as to execute the registration process. A plurality of data servers have various information and post information about updating of various information or contents of the updated information to the agents by means of broadcasting. When the posted information about updating or contents of the updated information is the information about updating which is requested by the registered user terminals, the agents post the information about updating or contents of the updated information to the registered user terminals via the network. The user terminals which have received the post access to the data servers which hold the contents of the updated information based on the posted information about updating and obtain the contents of the updated information, or receive the posted contents of the updated information so as to obtain them.

Further, a plurality of user terminals transmit information of the user terminals and requested various information to representative agent connected to the network. The representative agent transmit the information about user terminals and the request various information suitably to some of the plurality of agents in the subnetwork so as to execute the registration process. A plurality of data servers have various information and post information about updating of various information or contents of the updated information to the representative agent. The representative agent posts them

to the agent by means of broadcasting. When the posted information about updating or contents of the updated information is the information about updating which is requested by the registered user terminals, the agents post the

5 information about updating or contents of the updated information to the registered user terminals via the representative agent or the network. The user terminals which have received the post access to the data servers which hold the contents of the updated information based on the posted

10 information about updating and obtain the contents of the updated information, or receive the posted contents of the updated information so as to obtain them.

Further, a plurality of user terminals transmit information of the user terminals and requested various

15 information to agents which are locally connected to providers connecting the user terminals so as to execute the registration process. A plurality of data servers have various information, and IP-multi-cast and post information about updating of various information or contents of the updated information to

20 the agents via the provider. When the posted information about updating or contents of the updated information is the information about updating which is requested by the registered user terminals, the agents post the information about updating or contents of the updated information to the registered user

25 terminals. The user terminals which have received the post

access to the data servers which hold the contents of the updated information based on the posted information about updating and obtain the contents of the updated information, or receive the posted contents of the updated information so as to obtain them.

5 Further, a plurality of user terminals transmit information of the user terminals and requested various information to a high-hierarchical agent which is locally connected to the provider connecting the user so as to execute the registration process. The high-hierarchical agent
10 transmits the information of the registered user terminals and requested various information to a higher-hierarchical agent so as to execute a registration process. A plurality of data servers have various information, and IP-multi-cast and post information about updating of various information or contents
15 of the updated information to the highest-hierarchical agents via the provider. When the posted information about updating or contents of the updated information is the information about updating which is requested by the registered user terminals, the highest-hierarchical agents post the information about
20 updating to the registered user terminals or the contents of the updated information to the low-hierarchical agents. When the posted information about updating and contents of the updated information is information about updating requested by the registered user terminals, the low-hierarchical agents
25 which have received the post the information about updating to

the registered user terminals or contents of the updated information to the low-hierarchical agents or the user terminals. When the low-hierarchical agents have lower-hierarchical agents, the posting process which is similar to
5 the low-hierarchical agents is executed. The user terminals access to the data servers which hold the contents of the updated information based on the posted information about updating and obtain the contents of the updated information, or receive the posted contents of the updated information so as to obtain them.

10 Further, a plurality of user terminals transmit information of the user terminals and requested various information to some of not less than one agents so as to execute the registration process. A plurality of data servers have various information and post information about updating of
15 various information to the agents. When the posted information about updating is the information about updating which is requested by the registered user terminals, the not less than one agents post the information about updating to the registered user terminals via a network different from the above-mentioned
20 network, such as a portable telephone network. The user terminals which have received the post access directly to the data servers which hold contents of the updated information via the network based on the posted information about updating, and obtain the contents of the updated information.

25 Further, when not less than one agents accept the post

that various information is provided from a data server which is not registered in a list table of data servers which provide various information, the agents automatically register the unregistered data server into the list table.

5 Further, when not less than one agents accept the post of management contents of various information managed by data servers which provide the various information, the agents automatically add or delete data servers in data type management information based on the posted management contents.

10 Further, when not less than one agents accept the post of information about adding or deleting data types of various information managed by data servers which provide the various information, the agents add or delete data servers which relate to the data types to be added or deleted to/from the data servers
15 in data type management information.

 Further, when data types to be managed are changed, not less than one agents post the change of the data types to registered user terminals.

 Further, data types are managed in a hierarchical
20 relationship and when the data types are changed, not less than one agents post the change of the data types to user terminals in which data types with lower hierarchy than that of the changed data types.

 According to still another aspect of this invention,
25 information of the user terminals connected to a network using

an Internet protocol and various information which is requested to be posted by the user terminals are registered into agents, which are connected to the network and are substitute for the user terminals, at a registration step. A plurality of data servers which are connected to the network and hold various information post information about updating of the various information to the agents via the network at a first post step. When the agents accept the information about updating posted by the data servers and the information about updating is information about updating requested by the registered user terminals, the agents post the information about updating to the registered user terminals via the network at a second post step. The user terminals accept the post of the information about updating from the agents at a obtaining step. The user terminals accept to the data servers which have posted the information about updating at the first post step via the network so as to obtain contents of the updated information.

According to still another aspect of this invention, information of the user terminals connected to a network using an Internet protocol and various information which is requested to be posted by the user terminals are registered into agents, which are connected to the network and are substitute for the user terminals, at a registration step. A plurality of data servers which are connected to the network and hold various information post information about updating of the various

information to the agents via the network at a first post step. When the agents accept the information about updating posted by the data servers and the information about updating is information about updating requested by the registered user
5 terminals, the agents access to the data servers which have posted the information about updating via the network so as to obtain contents of the updated information at an obtaining step. The agents post the contents of the updated information obtained at the obtaining step to the registered user terminals via the
10 network at a second post step.

According to still another aspect of this invention, information of the user terminals connected to a network using an Internet protocol and various information which is requested to be posted by the user terminals are registered into agents,
15 which are connected to the network and are substitute for the user terminals, at a registration step. A plurality of data servers which are connected to the network and hold various information post contents of the updated various information to the agents via the network at a first post step. When the
20 agents accept the information about updating of the various information posted by the data servers and the information about updating is information about updating requested by the registered user terminals, the agents post the contents of the updated information to the registered user terminals via the
25 network at a second post step.

Further, agents post information about updating or contents of updated information, which are posted by data servers via a network other than the above network, such as a portable telephone network to user terminals.

5 Further, when not less than one agents accept the post that various information is provided from a data server which is unregistered in a list table for managing a list of data servers for providing the various information, the agents automatically register the data server into the list table.

10 Further, when not less than one agents accept the post of management contents of various information managed by data servers which provide the various information, the agents automatically add or delete data servers in data type management information managed per data type based on the posted management
15 contents.

Further, when not less than one agents accept the post of information about adding or deleting data types of various information managed by data servers which provide the various information, the agents automatically add or delete data
20 servers which relate to the data types to be added or deleted to/from the data servers in data type management information for managing the various information per data type.

Further, when data types to be managed are changed, not less than one agents automatically post the change of the data
25 types to the user terminals.

Further, data types are managed in a hierarchical relationship and when the data types are changed, not less than one agents post the change of the data types to user terminals in which data types with lower hierarchy than that of the changed data types.

Other objects and features of this invention will become apparent from the following description with reference to the accompanying drawings.

10 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram showing a structure of a push service system according to a first embodiment of the present invention.

Fig. 2 is a flow chart showing a push service processing procedure using the push service system according to the first embodiment of the present invention.

Fig. 3 is a flow chart showing detection process and transmission processing procedure for contents of updated information in a data server.

Fig. 4A and Fig. 4B are diagrams showing data management structures in a user terminal.

Fig. 5A to Fig. 5C are diagrams showing data management structures in an agent.

Fig. 6 is a diagram showing a data management structure in a data server.

Fig. 7 is a flow chart showing the push service processing

procedure according to a second embodiment of the present invention.

Fig. 8 is a flow chart showing the push service processing procedure according to a third embodiment of the present invention.

Fig. 9 is a diagram showing the structure of the push service system according to a fourth embodiment of the present invention.

Fig. 10 is a flow chart showing the push service processing procedure according to the fourth embodiment of the present invention.

Fig. 11 is a diagram showing the structure of the push service system according to a fifth embodiment of the present invention.

Fig. 12 is a flow chart showing the push service processing procedure according to the fifth embodiment of the present invention.

Fig. 13 is a diagram showing the structure of the push service system according to a sixth embodiment of the present invention.

Fig. 14 is a flow chart showing the push service processing procedure according to the sixth embodiment of the present invention.

Fig. 15 is a diagram showing the structure of the push service system according to a seventh embodiment of the present

invention.

Fig. 16 is a flow chart showing the push service processing procedure according to the seventh embodiment of the present invention.

5 Fig. 17 is a diagram showing the structure of the push service system according to an eighth embodiment of the present invention.

Fig. 18 is a flow chart showing the push service processing procedure according to the eighth embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of a document directory distributed management system, a method of obtaining this system, and a recording medium onto which a program for allowing
15 a computer to execute the method is recorded and which can be read by the computer according to the present invention will be explained below with reference to the drawings.

Fig. 1 is a diagram showing a structure of a push service system according to a first embodiment of the present invention.
20 In Fig. 1, in the push service system 10, an agent 1 is connected to the Internet N, a plurality of data servers 2 to 4 and a plurality of user terminals 5 to 7. The user terminals 5 to 7 register information about addresses of the user terminals
25 5 to 7 and information about types of data to be requested to

the agent (S11). The agent 1 serves as representation of the user registered user terminals 5 to 7, and when various information which is held and managed by the data servers 2 to 4 is updated, the data servers 2 to 4 post the information about updating to the agent 1 (S12).

When the information about updating is posted from the data servers 2 to 4, the agent 1 compares and analyzes as to whether the information about updating is the information to be requested by the user terminals 5 to 7. When both the information coincide with each other, the agent 1 posts the information about updating to the user terminals 5 to 7 (S13). When the user terminals 5 to 7 receives the information about updating, the user terminals 5 to 7 access directly to the data servers 2 to 4, which post the information about updating, via the Internet N, and obtain the contents of the updated information (S14).

As a result, a series of the push service process is executed. The agent 1 has a processing section 1a and a storage section 1b. The data servers 2 to 4 have processing sections 2a to 4a and storage sections 2b to 4b respectively. The user terminals 5 to 7 have processing sections 5a to 7a and storage sections 5b to 7b respectively.

A series of the push service process will be further explained below with reference to Fig. 2 and Fig. 3. Fig. 2 is a flow chart showing the push service processing procedure

using the push service system according to the first embodiment of the present invention. As shown in Fig. 2, the user terminals 5 to 7 request the agent 1 to register the user terminals 5 to 7 (steps S101 and S11). On the contrary, the agent 1 registers 5 the user terminals 5 to 7 which are requested to be registered (S102).

Meanwhile, the data servers 2 to 4 judge as to whether or not data sources of the various information stored in the storage sections 2b to 4b are updated (step S103). When the 10 data sources are updated (YES at step S103), the data servers 2 to 4 posts the information about updating to the agent 1 via the Internet N (steps S104 and S12). The information about updating is information representing that updating is executed and is not entity of the updated information.

15 The agent 1 executes a process for receiving the information about updating (step S105), and judges as to whether or not the information about updating is received (step S106). Thereafter, the agent 1 compares and analyzes the information about updating with the information held by the agent 1 (step 20 S107). In this comparison and analysis, the data type represented by the information about updating is compared with the data type registered by the user terminal so that a determination is made as to whether or not the data types coincide with each other or corresponding data type exists.

25 The agent 1 judges as to whether or not the received

information about updating should be transmitted to the registered user terminals (step S108). When the judgment is made that the information should be transmitted to the user terminals (YES at step S108), the agent 1 posts the information
5 about updating to the user terminals which request the information about updating and are registered (step S109 and S13). When the agent 1 does not receive the information about updating (NO at step S106) or do not transmit the information about updating (NO at step S108), the agent 1 goes to step S105
10 so as to repeat the process for receiving the information about updating.

The user terminals 5 to 7 execute the process for receiving the information about updating (step S110), and judge as to whether or not the information about updating is received
15 (step S111). When the information about updating is received (YES at step S111), the user terminals 5 to 7 post the information about updating (step S112). For example, the information about updating is displayed on display sections, not shown, of the user terminals 5 to 7 or an alarm is sounded. Thereafter, the user
20 terminals 5 to 7 request a data server which holds the contents of the updated information to obtain the contents of the updated information which are entity of the updated information based on the information about updating via the Internet N. The data server retrieves the requested contents of the updated
25 information, and transmits the contents of the updated

information to the user terminals which made the request. The user terminals obtain the contents of the updated information (steps S113, S114 and S14).

As a result, a series of the push service process is
5 executed. A retrieval processing and transmission processing procedures for the contents of updated information on the data server side shown at step S114 will be explained below with reference to the flow chart of Fig. 3. As shown in Fig. 3, the data server judges as to whether or not the request to obtain
10 the contents of the updated information is received from the user terminals (step S121). When the obtaining request is received (YES at step S121), the data server judges as to whether or not the requested contents of the updated information are information to be public without limitation (step S122). When
15 the contents of the updated information are to be public without limitation (YES at step S122), the data server transmits the contents of the updated information to the user terminals (step S126) and returns to step S114.

When the contents of the updated information are not to
20 be public without limitation (NO at step S122), the data server judges as to whether or not a settlement type is a user registration type or a real-time settlement type (step S123). When the user registration type, the data server executes a authenticating process using user's ID or password, and judges
25 as to whether or not this authentication is accepted (step S124).

When the authentication is accepted (YES at step S124), the data server executes accounting on the users (step S125). Thereafter, the data server transmits the contents of the updated information to the user terminals (step S126) and
5 returns to step S114. On the contrary, the authentication is not accepted (NO at step S124), the data server executes an error process (step S127) and returns to step S114.

Meanwhile, when the settlement is the real-time settlement type, the data server executes an authentication
10 process for making Internet settlement using credit card or prepaid card, and judges as to whether or not the authentication is accepted (step S128). When the authentication is accepted (YES at step S128), the data server transmits the contents of the updated information (step S126) and returns to step S114.
15 On the contrary, when the authentication is not accepted (NO at step S128), the data server executes an error process (step S129) and returns to step S114. Even if the contents of the updated information charge a fee, with the above-process, the data server securely makes the settlement and can provide the
20 contents of the updated information to the users.

Information about the push service process which is managed by the user terminals 5 to 7, the agent 1 and the data servers 2 to 4 will be explained below with reference to Fig. 4 to Fig. 6. Fig. 4A and Fig. 4B are diagrams showing data
25 management structures in the user terminals. When the user

terminals 5 to 7 request the agent 1 to register the user terminals, data, for example, shown in Fig. 4A are required.

In other words, the user terminals 5 to 7 request the agent 1 to register the user terminals 5 to 7 using an address D11 of the agent 1 in which the user terminals 5 to 7 should be registered, a registered data type D12 such as data type "news" and the like which is desired by the user terminals, a data obtaining requirement D13 such as "whole new information or price < 10,000 yen" and the like, user information D14 such as ID and password, terminal information D15 such as equipment type and the like, and another terminal information D16 held by the users such as equipment type, telephone number and the like. In this case, the address D11, the registered data type D12 and the data obtaining requirement D13 are essential information. When the user information D14, the terminal information D15, and the another terminal information D16 are required by the agent 1, they are required when the agent 1 accesses to the data servers 2 to 4 as mentioned below.

Fig. 4B shows data which are used when the user terminals access to the data servers for the request to obtain the contents of the updated information. The user terminals 5 to 7 hold a data server address D21 represented by IP or machine name and domain name, data type information D22 about ID or updated information which is the contents of data, and an access key D23 to data type such as ID, password, credit card No. and the

like. The data server address D21 and the data type information D22 are essential information.

Fig. 5A to Fig. 5C are diagrams showing the data management structures in the agent 1. As shown in Fig. 5A to 5 Fig. 5C, the agent 1 manages the user terminals 5 to 7 and the data server 2 to 4 according to the data type. As shown in Fig. 5A, the agent 1 holds user management contents of each data type, the agent 1 manages a relationship between the data types and the user terminals 5 to 7. The user management contents include 10 a data type information D31 such as ID and obtained data contents, user information D32 such as user ID, and another user information D33 incidental to data types and user IDs.

The data type information D31 and the user information D32 are essential information which should be managed by the 15 agent 1. The ID in the data type information D31 is represented by a serial number, a hierarchical code and a number from new data type, and the data types can be managed hierarchically. The data contents may be managed by using XML description so that the following hierarchical link relationships:

20 <Group1 name = news>
 <Group2 name = sports>
 ... are established.

Fig. 5B shows the data type management contents by means of the agent 1. A relationship between the data types and the 25 data servers 2 to 4 is managed by the management contents. The

data type management contents include data type information D41 such as ID, data contents and information price, membership data type D42, data server D43 which holds the data type. The data type information D41 is essential information.

5 Further, as shown in Fig. 5C, the agent 1 holds data server management contents, and manages a server list D51 of servers which are permitted to provide data or a server list D52 of servers which intend to provide data as list table.

Fig. 6 is a diagram showing the data management structure
10 in the data servers. As shown in Fig. 6, the data servers have the plurality of pieces of data type information D61 such as ID and data contents for the push service process, and holds data IDs (D62) in the respective data types such as changing date and the like and accompanying information D63 of the
15 respective data types such as pay/free. The data type information D61 is essential information for realizing this push service process.

When the post that various information is provided from an unregistered data server is received in the list table shown
20 in Fig. 5C, the agent 1 additionally registers the unregistered data server into the list table automatically.

When the agent 1 receives the post of the information management contents which are managed by a data server which provides various information from this data server, the agent
25 1 automatically adds or deletes the data server based on the

posted information management contents.

Further, the agent 1 automatically add or delete a data server relating to the data type of various information managed by the data server which provides the various information
5 to/from this data server.

When the data type managed by the agent 1 is changed, the agent 1 automatically posts the change of the data type to the user terminals.

According to the first embodiment, the Internet N is
10 connected with the agent 1 which is the representation of the user terminals 5 to 7, and the user terminals 5 to 7 register themselves as well as the information about a data type or the like to be requested into the agent 1. As a result, when the information held by the data servers 2 to 4 is changed, the
15 information about updating is posted to the agent 1. In the case where the user terminals 5 to 7 which request the information such as the data type corresponding to the posted information about updating are registered, the agent 1 posts the information about updating to the corresponding user
20 terminals 5 to 7. The user terminals 5 to 7 which received the post access to the data servers 2 to 4 directly via the Internet N so as to obtain the updated information contents. For this reason, the labor and time which are required for the user terminals 5 to 7 can be reduced on the user terminals 5 to 7
25 side, and the desired updated information contents can be

obtained quickly. Moreover, since the limited agent 1 intervenes in the whole Internet, useless traffic on the Internet does not increase, and resources to be required for the push service process can be reduced. Further, the expandability of the push service process can be heightened.

A second embodiment of the present invention will be explained below. In the first embodiment, when the agent 1 receives the information about updating from the data servers 2 to 4, and if the user terminals 5 to 7 which requests the information such as the data type corresponding to the information about updating are included in the registered user terminals 5 to 7, the agent 1 posts the information about updating to the user terminals 5 to 7 and entrust the obtaining of the contents of the updated information to the user terminals 5 to 7. However, in this second embodiment, when the agent 1 receives the information about updating from the data servers 2 to 4 and the user terminals 5 to 7 which requests the information such as data type corresponding to the information about updating are included in the registered user terminals 5 to 7, the agent 1 obtains the contents of the updated information instead of the user terminals 5 to 7 and transmits the obtained contents of the updated information to the user terminals 5 to 7.

The structure of the push service system according to the second embodiment is the same as the structure in the first

embodiment shown in Fig. 1. However, the processes by the agent 1 and the user terminals 5 to 7 are different. The push service processing procedure in the second embodiment of the present invention will be explained below with reference to the flow chart shown in Fig. 7.

As shown in Fig. 7, the user terminals 5 to 7 execute a registration request process for the agent 1 (steps S201 and S11a). On the contrary, the agent 1 executes a registration process of the user terminals 5 to 7 requested to be registered (S202).

Meanwhile, the data server 2 to 4 judges as to whether or not data sources of various information stored in the storage sections 2b to 4b are updated (step S203). When the data sources are updated (YES at step S203), the data servers 2 to 4 posts information about updating to the agent 1 via the Internet N (steps S204 and S12a). The information about updating is information representing updating and is not entity of the updated information.

The agent 1 executes a process for receiving the information about updating (step S205), and judges as to whether or not the information about updating is received (step S206). Thereafter, the agent 1 compares and analyzes the information about updating with information held by the agent 1 (step S207). In this comparison and analysis, the data type represented by the information about updating is compared with the data type

registered by the user terminal so that a determination is made as to whether or not the data types coincide with each other or corresponding data type exists. Thereafter, the agent 1 judges as to whether or not contents of updated information
5 corresponding to the received information about updating should be obtained (step S208).

When the judgment is made that the contents of the updated information should be obtained (YES at step S208), the agent 1 requests the data server which holds the contents of the
10 updated information about obtaining the contents of the updated information which are entity of the updated information via the Internet N based on the information about updating. The data server retrieves the requested contents of the updated information and transmits the contents of the updated
15 information to the agent 1 which made the request. The agent 1 obtains the contents of the updated information (steps S209, S210 and S13a). On the contrary, the judgment is made that the contents of the updated information should not be obtained (NO at step S208), the agent 1 returns to step S205 and repeats the
20 process for receiving the information about updating.

Thereafter, the agent 1 transmits the obtained contents of the updated information to the corresponding to user terminals (step S211 and S14a). The user terminals execute a process for receiving the contents of the updated information
25 (step S212), and ends a series of the push service process.

According to the second embodiment, in the case where the information about updating is posted to the agent 1, and the user terminals 5 to 7 which request the information such as data type corresponding to the posted information about updating are registered, the agent 1 accesses to the data servers 2 to 4 and obtains the contents of the updated information based on the information about updating. The agent 1 transmits the obtained contents of the updated information to the corresponding to the user terminals 5 to 7. As a result, the labor and time required on the side of the user terminals 5 to 7 can be further reduced, and the desirable contents of the updated information can be obtained quickly. Moreover, since the limited agent 1 intervenes in the whole Internet, useless traffic on the Internet does not increase, and the resources relating to the push service process can be reduced. Further, the expandability of the push service process can be heightened.

A third embodiment of the present invention will be explained below. In the second embodiment, instead of the user terminals 5 to 7, the agent 1 accesses to the data servers 2 to 4 and obtains the contents of the updated information, and transmits the contents of the updated information to the corresponding user terminals 5 to 7. However, in this third embodiment, in the case where information is changed in the data servers 2 to 4, the data servers 2 to 4 transmit contents of the updated information to the agent 1. The agent 1 transmits

the contents of the updated information to the user terminals 5 to 7.

The structure of the push service system in the third embodiment is the same as the structure in the first embodiment shown in Fig. 1. However, the processes of the data servers 2 to 4, the agent 1 and the user terminals 5 to 7 are different. The push service processing procedure according to the third embodiment of the present invention will be explained below with reference to the flow chart shown in Fig. 8.

As shown in Fig. 8, the user terminals 5 to 7 executes a registration request process for the agent 1 (step S301 and S11b). On the contrary, the agent 1 registers the user terminals 5 to 7 which are requested to be registered (S302).

The data servers 2 to 4 judges as to whether or not data sources of various information stored in the storage sections 2b to 4b are updated (step S303). When the data sources are updated (YES at step S303), the data servers 2 to 4 post contents of updated information including the information about updating to the agent 1 via the Internet N (steps S304 and S12b).

The agent 1 executes a process for receiving the contents of the updated information (step S305) and judges as to whether or not the contents of the updated information are received (step S306). Thereafter, the agent 1 compares and analyzes the contents of the updated information with information held by the agent 1 (step S307). In this comparison and analysis, the

data type represented by the contents of the updated information is compared with the data type registered by the user terminal so that a determination is made as to whether or not the data types coincide with each other or corresponding data type exists.

- 5 Thereafter, the agent 1 judges as to whether or not the received contents of the updated information should be transmitted to the user terminals (step S308).

- When the contents of the updated information should not be transmitted (NO at step S308), the agent 1 goes to step S305
10 and repeats the process for receiving the contents of updated information. On the contrary, when the contents of the updated information should be transmitted (YES at step S308), the agent 1 transmits the contents of the updated information to the corresponding user terminals (steps S309 and S13b). The user
15 terminals execute a process for receiving the contents of the updated information (step S310) so as to end a series of the push service process.

- According to the third embodiment, when the information held by the data servers 2 to 4 is updated, the data servers
20 2 to 4 transmit the contents of the updated information to the agent 1. The agent 1 transmits the contents of the updated information to the user terminals 5 to 7 which request the information corresponding to the contents of the updated information. Accordingly, the labor and time required in the
25 user terminals 5 to 7 can be further reduced, and the contents

of the desirable updated information can be obtained quickly. Since the limited agent 1 intervenes in the Internet, useless traffic on the Internet does not increase, and resources relating to the push service process can be reduced. Further, 5 the expandability of the push service process can be heightened.

A fourth embodiment of the present invention will be explained below. In the first to third embodiments, the agent 1 which is connected directly with the Internet N executes the process instead of the user terminals 5 to 7. However, in this 10 fourth embodiment, a plurality of agents are provided in the sub-net connected to the Internet N, and the plurality of agents execute the push service process efficiently.

Fig. 9 is a diagram showing the structure of the push service system according to the fourth embodiment of the present 15 invention. As shown in Fig. 9, in a push service system 20, a plurality of data servers 2 to 4 and a plurality of user terminals 5 to 7 are connected to the Internet N, and an agent subnetwork NN such as LAN is connected to the Internet N via router 24. A plurality of agents 21 to 23 in the agent 20 subnetwork NN are connected to the Internet N via the router 24. The user terminals 5 to 7 register information such as addresses of the user terminals 5 to 7 and information such as data types to be required respectively into one of the agents 21 to 23 (S21).

25 The agents 21 to 23 serve as substitute for the registered

the push service processing procedure performed by the push service system according to the fourth embodiment of the present invention. As shown in Fig. 10, the user terminals 5 to 7 execute a registration request process for the agents 21 to 23 (steps S401 and S21). The agents 21 to 23 which have received the request of the registration register the user terminals 5 to 7 which have requested the registration (S402).

Meanwhile, the data servers 2 to 4 judge as to whether or not data sources of various information stored in the storage sections 2b to 4b are updated (step S403). When the data sources are updated (YES at step S403), the data servers 2 to 4 broadcast to post the information about updating to the agents 21 to 23 via the Internet N and the router 24 (steps S404 and S22). The information about updating is information representing updating and is not entity of the updated information.

The agents 21 to 23 execute a process for receiving the information about updating (step S405), and judge as to whether or not the information about updating is received (step S406). Thereafter, the agents 21 to 23 compare and analyze the information about updating with the information held by the agents 21 to 23 (step S407). In the comparison and analysis, the data type represented by the information about updating is compared with the data type registered by the user terminal so that a determination is made as to whether or not the data types coincide with each other or corresponding data type exists.

Thereafter, the agents 21 to 23 judge as to whether or not the received information about updating should be transmitted to the registered user terminals (step S408). When the judgment is made that the information about updating should be transmitted to the user terminals (YES at step S408), the agents 21 to 23 posts the information about updating to the user terminals which request and are registered (steps S409 and S23). When the information about updating is not received (NO at step S406) and is not transmitted (NO at step S408), the agents 21 to 23 go to step S405 and repeats the process for receiving the information about updating.

The user terminals 5 to 7 execute a process for receiving the information about updating (step S410), and judge as to whether or not the information about updating is received (step S411). When the information about updating is received (YES at step S411), the user terminals 5 to 7 notify the information about updating (step S412). For example, the information about updating are displayed on display sections, not shown, of the user terminals 5 to 7 or an alarm is sounded.

Thereafter, the user terminals 5 to 7 request the data servers, which hold contents of the updated information as entity of the updated information, as to the obtaining of the contents of the updated information based on the information about updating via the Internet N. The data servers retrieve the requested contents of the updated information and transmit

the contents of the updated information to the user terminals which have made the request. The user terminals obtain the contents of the updated information (steps S413, S414 and S24). As a result, a series of the push service process according to

5 the fourth embodiment is executed.

The fourth embodiment explains that the process corresponding to the process in the first embodiment is executed, but the process is not limited to this and the process corresponding to the process in the second or third embodiment

10 may be executed. That is, in the case where the process corresponding to that in the second embodiment is executed, the agents 21 to 23 access to the data servers 2 to 4 based on the information about updating posted by the data servers 2 to 4 so as to obtain the contents of the updated information, and

15 transmit the obtained contents of the updated information to the user terminals 5 to 7. Moreover, in the case where the process corresponding to that in the third embodiment is executed, the data servers 2 to 4 transmit the contents of the updated information to the agents 21 to 23, and the agents 21

20 to 23 transmit the contents of the updated information to the user terminals 5 to 7.

According to the fourth embodiment, a plurality of the agents 21 to 23 are provided in the agent subnetwork NN, and the plurality of agents 21 to 23 are connected to the Internet

25 N via the router 24. For this reason, if user terminals to be

registered in the agents increase, the labor and time required in the user terminals 5 to 7 can be reduced, and the desired contents of the updated information can be obtained quickly. Moreover, since the limited agents intervene in the Internet, useless traffic on the Internet does not increase, and resources relating to the push service process can be reduced. Moreover, the expandability of the push service process can be heightened.

A fifth embodiment of the present invention will be explained below. In the fourth embodiment, the agent subnetwork NN is connected to the Internet N via the router 24. However, in this fifth embodiment, a representative agent 25 is provided between the router 24 and the Internet N, and the agents 21 to 23 in the agent subnetwork NN are connected to the Internet N via the representative agent 25.

Fig. 11 is a diagram showing the structure of the push service system according to the fifth embodiment of the present invention. As shown in Fig. 11, in the push service system 30, a plurality of data servers 2 to 4 and a plurality of user terminals 5 to 7 and the representative agent 25 are connected to the Internet N. The representative agent 25 is connected to the agent subnetwork NN such as LAN via the router 24, and the plurality of agents 21 to 23 in the agent subnetwork NN are connected to the Internet N via the router 24 and the representative agent 25. That is, the representative agent 25 is provided between the router 24 and the Internet N in the

structure according to the fourth embodiment.

5 The user terminals 5 to 7 transmit information such as addresses of the user terminals 5 to 7 and information such as data types to be requested as registration request to the representative agent 25 (S31). The representative agent 25 transmits the registration request to suitable one of the agents 21 to 23 (S32), and the agents 21 and 23 register the user terminals which have made the registration request. The agents 21 to 23 serve as substitute for the registered user terminals 5 to 7. In the case where various information which is held and managed by the data servers 2 to 4 is updated, the data servers 2 to 4 transmit the information about updating to the representative agent 25 (S33). The representative agent 25 broadcasts the information about updating to the agents 21 to 23 via the router 24 (S34).

When the information about updating is posted, the agents 21 to 23 make comparison and analysis as to whether or not the information about updating is information requested by the user terminals 5 to 7. When both the information coincide with each other, the agents 21 to 23 transmit the information about updating to the representative agent 25 (S35). The representative agent 25 posts the information about updating to the user terminals 5 to 7 (S36). When the user terminals 5 to 7 receive the information about updating, the user terminals 5 to 7 access directly to the data servers 2 to 4 which

have posted the information about updating via the Internet N, and obtain contents of the updated information (S37).

When the data servers 2 to 4 and the user terminals 5 to 7 have the addresses of the agents 21 to 23, the data servers 2 to 4 and the user terminals 5 to 7 may access directly to the agents 21 to 23. In this case, the representative agent 25 only execute a transit process as a simple path.

The agents 21 to 23 have processing sections 21a to 23a and storage sections 21b and 23b respectively. The representative agent 25 has a processing section 25a and a storage section 25b. The data servers 2 to 4 have processing sections 2a to 4a and storage sections 2b and 4b respectively. The user terminals 5 to 7 have processing sections 5a to 7a and storage sections 5b to 7b respectively.

A series of the push service process according to the fifth embodiment will be explained below with reference to the flow chart shown in Fig. 12. Fig. 12 is the flow chart showing the push service processing procedure performed by the push service system according to the fifth embodiment of the present invention. As shown in Fig. 12, the user terminals 5 to 7 execute a registration request process for the representative agent 25 (steps S501 and S31).

The representative agent 25 selects a suitable agent from the agents 21 to 23 based on the contents of the updated information, and execute a transit process of the registration

request for the selected agent 21 to 23 (step S502 and S32). When the agents 21 to 23 which receives the registration request execute the process for registering the user terminals 5 to 7 which have made the registration request (S503).

5 Meanwhile, the data servers 2 to 4 judge as to whether or not data sources of various information stored in the storage sections 2b to 4b (step S504). When the data sources are updated (YES at step S504), the data servers 2 to 4 post the information about updating to the representative agent 25 via the Internet
10 N (steps S505 and S33). The representative agent 25 which has received the post broadcasts and posts the information about updating to the agents 21 to 23 via the router 24 (steps S506 and S34).

 The agents 21 to 23 execute a process for receiving the
15 information about updating (step S507), and judge as to whether or not the information about updating is received (step S508). Thereafter, the agents 21 to 23 compare and analyzes the information about updating with the information held by the agents 21 to 23 (step S509). In this comparison and analysis,
20 the data type represented by the information about updating is compared with the data type registered by the user terminal so that a determination is made as to whether or not the data types coincide with each other or corresponding data type exists.

 Thereafter, the agents 21 to 23 judge as to whether or
25 not the information about updating should be transmitted to the

registered user terminals (step S510). When the judgment is made that the information about updating should be transmitted to the user terminals (YES at step S510), the agents 21 to 23 transmits the information about updating to the representative agent 25 (steps S511 and S35). The representative agent 25 posts the information about updating to the registered user terminals (steps S512 and S36). When the information about updating is not received (NO at step S508) and is not transmitted (NO at step S510), the agents 21 to 23 go to step S507 and repeat the process for receiving the information about updating.

The user terminals 5 through 7 execute a process for receiving the information about updating (steps S513), and judge as to whether or not the information about updating is received (step S514). When the information about updating is received (YES at step S514), the user terminals 5 to 7 notify the information about updating (step S515). For example, the information about updating is displayed on the display sections, not shown, of the user terminals 5 to 7 or an alarm is sounded.

Thereafter, the user terminals 5 to 7 request the data servers which hold contents of the updated information which is entity of the updated information as to obtaining the contents of the updated information based on the information about updating via the Internet N. The data servers retrieve the requested contents of the updated information, and transmit the contents of the updated information to the user terminals

which have made the request. The user terminals obtain the contents of the updated information (steps S516, S517 and S37). As a result, a series of the push service process according to the fifth embodiment is executed.

5 The fifth embodiment described that the process corresponding to the process in the first embodiment is executed, but the process is not limited to this, and the process corresponding to the process in the second or third embodiment may be executed. That is, in the case where the process
10 corresponding to the process in the second embodiment is executed, the agents 21 to 23 access to the data servers 2 to 4 based on the information about updating posted by the data servers 2 to 4, and obtain the contents of the updated information. The agents 21 to 23 transmit the obtained contents
15 of the updated information to the user terminals 5 to 7. Moreover, in the case where the process corresponding to the process in the third embodiment is executed, the data servers 2 to 4 transmit the contents of the updated information to the agents 21 to 23. The agents 21 to 23 transmit the contents of
20 the updated information to the user terminals 5 to 7.

 According to the fifth embodiment, a plurality of agents 21 to 23 which are provided in the agent subnetwork NN are unified by the representative agent 25. For this reason, if user terminals to be registered into the agent increase, the labor
25 and time required in the user terminals 5 to 7, particularly

the labor and time required in the registration process can be reduced, and the desired contents of the updated information can be obtained quickly. Moreover, since the representative agent intervenes in the Internet, useless traffic on the Internet does not increase, and resources relating to the push service process can be reduced. Moreover, the expandability of the push service process can be heightened.

A sixth embodiment of the present invention will be explained below. In the fourth and fifth embodiments, a plurality of agents are provided in the subnetwork to be connected to the Internet N, and the push service process is executed efficiently by the plurality of agents. However, in this sixth embodiment, an agent is provided in a provider to be connected to the Internet N, and the push service process is executed via the agent.

Fig. 13 is a diagram showing the structure of the push service system according to the sixth embodiment of the present invention. As shown in Fig. 13, in the push service system 40, a plurality of data servers 2 to 4 and a plurality of providers 41 and 42 are connected to the Internet N. The providers 41 and 42 locally connect agents 43 and 44 and connect a plurality of user terminals 5 to 7 and 45 to 47.

The user terminals 5 to 7 and 45 to 47 register information such as addresses of the user terminals 5 to 7 and 45 to 47 and information such as data types to be requested into the agents

43 and 44 of the providers 41 and 42 which are connected to the user terminals 5 to 7 and 45 to 47 (S41). The agents 43 and 44 serve as substitute for the registered user terminals 5 to 7 and 45 to 47. When various information which is held and managed by the data servers 2 to 4 is updated, the data servers 2 to 4 transmit information about updating to the providers 41 and 42 having the agents 43 and 44 and post it to the agents 43 and 44 (S42).

When the information about updating is posted from the data servers 2 to 4, the agents 43 and 44 make comparison and analysis as to whether or not the information about updating is information which is requested by the user terminals 5 to 7 and 45 to 47 connected to the providers 41 and 42. When both the information coincide with each other, the agents 43 and 44 post the information about updating to the user terminals 5 to 7 and 45 to 47 (S43). When the user terminals 5 to 7 and 45 to 47 receive the information about updating, the user terminals 5 to 7 and 45 to 47 access directly to the data servers 2 to 4, which have posted the information about updating. via the Internet N so as to obtain contents of the updated information (S44).

As a result, a series of the push service process is executed. The agents 43 and 44 have processing sections 43a and 44a and storage sections 43b and 44b respectively. The data servers 2 to 4 have processing sections 2a to 4a and storage

sections 2b to 4b respectively. The user terminals 5 to 7 have processing sections 5a to 7a and storage sections 5b to 7b respectively.

A series of the push service process according to the sixth embodiment will be explained below with reference to the flow chart in Fig. 14. Fig. 14 is the flow chart showing the push service processing procedure performed by the push service system according to the sixth embodiment of the present invention. As shown in Fig. 14, for example, the user terminals 5 to 7 execute a registration request process for the agent 43 of the provider 41 (steps S601 and S41). On the contrary, the agent 43 execute a process for registering the user terminals 5 to 7 which have made the registration request (S602).

Meanwhile, the data servers 2 to 4 judge as to whether or not the data sources of various information stored in the storage sections 2b to 4b are updated (step S603). When the data sources are updated (YES at step S603), the data servers 2 to 4 IP-multi-cast the information about updating to the provider 41 via the Internet N and post it to the agent 43 (steps S604 and S42).

The agent 43 executes a process for receiving the information about updating (step S605), and judges as to whether or not the information about updating is received (step S606). Thereafter, the agent 43 compares and analyzes the information about updating with the information held by the agent 43 (step

S607). In the comparison and analysis, the data type represented by the information about updating is compared with the data type registered by the user terminal so that a determination is made as to whether or not the data types
5 coincide with each other or corresponding data type exists.

Thereafter, the agent 43 judges as to whether or not the received information about updating should be transmitted to the registered user terminals 5 to 7 (step S608). When the judgment is made that the information about updating should be
10 transmitted to the user terminals 5 to 7 (YES at step S608), the agent 43 posts the information about updating to the registered user terminals 5 to 7 (steps S609 and S43). When the information about updating is not received (NO at step S606) and is not transmitted (NO at step S608), the agent 43 goes to
15 step S605 so as to repeat the process for receiving the information about updating.

The user terminals 5 to 7 execute a process for receiving the information about updating (step S610) and judge as to whether or not the information about updating is received (step
20 S611). When the information about updating is received (YES at step S611), the user terminals 5 to 7 notify the information about updating (step S612). For example, the information about updating is displayed on the display sections, not shown, of the user terminals 5 to 7 or an alarm is sounded.

25 Thereafter, the user terminals 5 to 7 request the data

contents of the updated information to the user terminals 5 to 7 and 45 to 47.

According to the sixth embodiment, the agents 43 and 44 are provided in the providers 41 and 42 which connect the user terminals 5 to 7 and 45 to 47, and the agents 43 and 44 distributively manage and are substitute for the user terminals 5 to 7 and 45 to 47 connected with the providers 41 and 42. For this reason, the labor and time required in the user terminals 5 to 7 and 45 to 47 can be reduced, and the desired contents of the updated information can be obtained quickly. Moreover, useless traffic on the Internet does not increase, and resources relating to the push service process can be reduced. Moreover, the expandability of the push service process can be heightened.

A seventh embodiment of the present invention will be explained below. In the sixth embodiment, the agents are provided in the provider to be connected to the Internet N, and the push service process is executed via the agents. However, in the seventh embodiment, a hierarchical relationship is given to the agents correspondingly to a hierarchical relationship of the providers so that the push service process is executed.

Fig. 15 is a diagram showing the structure of the push service system according to the seventh embodiment of the present invention. As shown in Fig. 15, in the push service system 50, a plurality of data servers 2 to 4 and a plurality of providers 51 to 54 are connected to the Internet N. The

providers 51 to 54 locally connect the agents 55 to 58.

Low hierarchical providers 52 and 53 are connected to the provider 51, and agents 55 and 56 are locally connected to the providers 52 and 53 respectively. Moreover, the providers 52, 5 53 and 54 connect the user terminals 5, 6, 7 and 8. As a result, the agent 55 is substitute for the user terminals 5 and 6, the agent 56 is substitute for the user terminal 7, the agent 58 is substitute for the user terminals 5 to 7, and the agent 57 is substitute for the user terminal 8. Namely, the agent 58 10 and the agents 55 and 56 have the hierarchical relationship.

As for a summary of a series of the push service process, for example the user terminal 7 registered information such as an address of the user terminal 7 and information such as a data type to be requested into the agent 56 of the provider 53 (S51). 15 The agent 56 serves as the user terminal for the high hierarchical agent 58. The agent 56 registers the user terminal 7 and requests the high-hierarchical agent 58 of the high-hierarchical provider 51 to register the user terminal 7 so as to register (S52). When various information which is held and 20 managed by the data servers 2 to 4 is updated, the server 2 to 4 IP-multi-scan information about updating to the providers 51 and 54 so as to transmit the information about updating to the agents 58 and 57 (S53). When the information about updating is information about updating which is managed by the registered 25 low-hierarchical agent, the agent 58 posts the information

about updating to the agent 56 (S54).

Further, when the information about updating is information about updating which is requested by the registered user terminal 7, the agent 56 posts the information about updating to the user terminal 7 (S55). When the user terminal 7 receives the information about updating, the user terminal 7 accesses directly to the data servers 2 to 4 which have posted the information about updating via the Internet N so as to obtain contents of the updated information (S56). As a result, a series of the push service process is executed. The agents 55 to 58 have processing sections 55a to 58a and storage sections 55b to 58b respectively. The data servers 2 to 4 have processing sections 2a to 4a and storage sections 2b and 4b respectively. The user terminals 5 to 8 have processing sections 5a to 8a and storage sections 5b and 8b respectively.

A series of the push service process according to the seventh embodiment will be explained below with reference to the flow chart shown in Fig. 16. Fig. 16 is the flow chart showing the push service processing procedure performed by the push service system according to the seventh embodiment of the present invention. As shown in Fig. 16, for example user terminals 5 to 7 request the low-hierarchical agents 55 and 56 of the providers 52 and 53 connected to the user terminals 5 to 7 to register the user terminals 5 to 7 (steps S701 and S51). The low-hierarchical agents 55 and 56 which receive the

registration request execute the registration process (step S702), and request the high-hierarchical agent 58 to register the registered contents (steps S703 and S52). On the contrary, the high-hierarchical agent 58 registers the low-hierarchical agents 55 and 56 which have been requested as to their registration (step S704).

Meanwhile, the data servers 2 to 4 judge as to whether or not data sources of various information stored in the storage sections 2b to 4b are updated (step S705). When the data sources are updated (YES at step S705), the data servers 2 to 4 IP-
10 multi-cast information about updating to the providers 51 and 57 via the Internet N and post the information about updating to the agents 58 and 57 (steps S706 and S53).

The high-hierarchical agent 58 executes a process for
15 receiving the information about updating (step S707), and judges as to whether or not the information about updating is received (step S708). Thereafter, the high-hierarchical agent 58 compares and analyzes the information about updating with information held by the agent 58 (step S709). In this
20 comparison and analysis, the data type represented by the information about updating is compared with the data type registered by the user terminal so that a determination is made as to whether or not the data types coincide with each other or corresponding data type exists.

25 Thereafter, the high-hierarchical agent 58 judges as to

whether or not the received information about updating should be transmitted to the low-hierarchical agents 55 and 56 (step S710). When the judgment is made that the information about updating should be transmitted to the low-hierarchical agents 5 55 and 56 (YES step S710), the agent 58 posts the information about updating to the registered low-hierarchical agents 55 and 56 which have made the request (steps S711 and S54). When the information about updating is not received (NO at step S708) and is not transmitted (NO at step S710), the agent 58 goes to 10 step S707 so as to repeat the process for receiving the information about updating.

The low-hierarchical agents 55 and 56 execute a process for receiving the information about updating from the high-hierarchical agent 58 (step S712), and judge as to whether or 15 not the information about updating is received (step S713). Thereafter, the agents 55 and 56 compare and analyze the information about updating with information held by the agents 55 and 56 (step S714). Thereafter, the agents 55 and 56 judge as to whether or not the received information about updating 20 should be transmitted to the user terminals 5 and 6 and the user terminal 7 connected to the agents 55 and 56 respectively (step S715). When the judgment is made that the information about updating should be transmitted to the user terminals 5 to 7 (YES at step S715), the agents 55 and 56 post the information about 25 updating to the registered user terminals 5 to 7 which have made

the request (steps S716 and S55). When the information about updating is not received (NO at step S713) and is not transmitted (NO at step S715), the agents 55 and 56 go to step S712 so as to repeat the process for receiving the information about updating.

The user terminals 5 to 7 execute a process for receiving the information about updating (step S717), and judge as to whether or not the information about updating is received (step S718). When the information about updating is received (YES at step S718), the user terminals 5 to 7 notify the information about updating (step S719). For example, the information about updating is displayed on the display sections, not shown, of the user terminal 5 to 7 or an alarm is sounded.

Thereafter, the user terminals 5 to 7 request the data servers which hold contents of the updated information which is entity of the updated information as to obtaining of the contents of the updated information via the Internet N based on the information about updating. The data servers retrieve the requested contents of the updated information and transmit the contents of the updated information to the user terminals which have made the request. The user terminals obtain the contents of the updated information (steps S720, S721 and S56). As a result, a series of the push service process according to the seventh embodiment is executed.

The seventh embodiment described that the process

corresponding to the process in the first embodiment is executed, but the process is not limited to this, and the process corresponding to the process in the second or third embodiment may be executed. That is, in the case where the process

5 corresponding to the process in the second embodiment is executed, the agent 51 or the agents 55 to 56 access to the data servers 2 to 4 based on the information about updating posted by the data servers 2 to 4, and obtain the contents of the updated information. The obtained contents of the updated information

10 is transmitted to the user terminals 5 to 7 directly or via the agents 55 and 56. Moreover, in the case where the process corresponding to the process in the third embodiment is executed, the data servers 2 to 4 transmit the contents of the updated information to the agent 51. The agent 51 transmits the

15 contents of the updated information to the agents 55 and 56, and the agents 55 and 56 transmit the contents of the updated information to the user terminals 5 to 7.

When the data type which is managed by the high-hierarchical agent 51 is updated, the agent 51 automatically

20 posts the updated data type to the low-hierarchical agents 55 and 56.

According to the seventh embodiment, the agent 51 is the high-hierarchical agent and the agents 55 and 56 are the low-hierarchical agents, namely, a plurality of agents are

25 provided so as to have the hierarchical relationship.

Accordingly, the labor and time required in the user terminals 5 to 7 and 45 to 47 can be reduced, and the desired contents of the updated information can be obtained quickly. Moreover, useless traffic on the Internet does not increase, and resources relating to the push service process can be reduced. Moreover, the expandability of the push service process can be heightened.

Eighth embodiment of the present invention will be explained below. In the first to seventh embodiments, the agent transmits the information about updating and the contents of the updated information to the user terminals via the Internet N. In this eighth embodiment an agent utilizes a network different from the Internet N and transmits information about updating and contents of updated information to user terminals.

Fig. 17 is a diagram showing the structure of the push service system according to the eighth embodiment of the present invention. As shown in Fig. 17, in the push service system 60, similarly to the structure in the first embodiment shown in Fig. 1, the agent 1, a plurality of data servers 2 to 4 and a plurality of user terminals 5 to 7 are connected to the Internet N. Further, a portable remote terminal 67 which is recognized as a user 66 of the user terminal 7 is provided, and a portable telephone network N3 which is a network different from the Internet N intervenes between the agent 1 and the portable remote terminal 67.

As for a summary of a series of the push service process

in the eighth embodiment, the user terminals 5 to 7 register information such as addresses of the user terminals 5 to 7 and information of data types to be requested into the agent 1 (S61). When various information which is held and managed by the data servers 2 to 4 is updated, the data servers 2 to 4 transmits information about updating to the agent 1 (S62). When the information about updating is information relating to updating managed by the registered user terminal 7, the agent 1 posts it to the portable remote terminal 67 via the portable telephone network N3 (S63).

When the portable remote terminal 67 receives the information about updating, the portable remote terminal 67 and the user 66 of the user terminal 7 access directly to the data servers 2 to 4 which have posted the information about updating via the Internet N using the user terminal 7, and obtain contents of the updated information (S64). As a result, a series of the push service process is executed. The agent 1 has a processing section 1a and a storage section 1b. The data servers 2 to 4 have processing sections 2a to 4a and storage sections 2b to 4b respectively. The user terminals 5 to 7 have processing sections 5a to 7a and storage sections 5b to 7b respectively.

A series of the push service process according to the eighth embodiment will be explained below with reference to the flow chart shown in Fig. 18. Fig. 18 is the flow chart showing the push service processing procedure performed by the push

service system according to the eighth embodiment of the present invention. As shown in Fig. 18, the user terminals 5 to 7 execute a registration process for the agent 1 (steps S801 and S61). On the contrary, the agent 1 executes a registration
5 process for the user terminals 5 to 7 which have made the registration request (S802).

Meanwhile, the data servers 2 to 4 judge as to whether or not data sources of various information stored in the storage sections 2b to 4b are updated (step S803). When the data sources
10 are updated (YES at step S803), the data servers 2 to 4 post information about updating to the agent 1 via the Internet N (steps S804 and S62). The information about updating is information representing updating and is not entity of the updated information.

15 The agent 1 executes a process for receiving the information about updating (step S805), and judges as to whether or not the information about updating is received (step S806). Thereafter, the agent 1 compares and analyzes the information about updating with information held by the agent 1 (step S807).
20 In this comparison and analysis, the data type represented by the information about updating is compared with the data type registered by the user terminal so that a determination is made as to whether or not the data types coincide with each other or corresponding data type exists. Thereafter, the agent 1
25 judges as to whether or not the received information about

updating should be transmitted to the registered user terminals (step S808).

When the judgment is made that the information about updating should be transmitted to the user terminals (YES at step S808), the agent 1 posts the information about updating to the portable remote terminal 67 which is recognized as the user of the registered user terminal 7 which has made the request via the portable telephone network N3 (steps S809 and S63). In the case where the information about updating can be posted to the portable remote terminal 67 via the portable telephone network N3, when the user terminal 7 is registered as another terminal information D16 shown in Fig. 4A into the agent 1, it is necessary to register information such as type and telephone number of the portable remote terminal. When the information about updating is not received (NO at step S806) and is not transmitted (NO at step S808), the agent 1 goes to step S805 so as to repeat the process for receiving the information about updating.

The portable remote terminal 67 executes a process for receiving the information about updating (step S810), and judges as to whether or not the information about updating is received (step S811). When the information about updating is received (YES at step S811), the portable remote terminal 67 notify the information about updating (step S812). For example, the information about updating is displayed on a display section,

not shown, of the portable remote terminal 67, or an alarm or a vibration is generated. Thereafter, the user terminal 7 of the user 66, which receive the notification requests the data servers which hold contents of the updated information which
5 is entity of the updated information, as to obtaining the contents of updated information via the Internet N based on the information about updating. The data servers retrieve the requested contents of the updated information and transmit the contents of the updated information to the user terminal which
10 has made the request. The user terminal obtains the contents of the updated information (steps S813, S814 and S64).

When the information about updating is posted to the portable remote terminal 67 via the portable telephone network N3, the agent 1 does not post the information about updating
15 but may simply post the updating or post a telephone number with which the agent 1 can be recognized. As a result, the user 66 can know that the information desired by the user 66 is changed, and when the user 66 inquires at the agent 1 or the information is less data type, the user 66 may access to the data servers
20 directly.

Fig. 17 shows the structure that the portable remote terminal 67 is separated from the user terminal 7, but the structure is not limited to this, and the portable remote terminal 67 may be connected to the user terminal 7. In this
25 case, the information about updating is posted to the user

terminal 7 via the portable telephone network N3 which is a network other than the Internet N.

Further, the portable telephone network N3 is shown as one example of a network other than the Internet N, but the network is not limited to this, another one may be used.

The eighth embodiment described that the process corresponding to the process in the first embodiment is executed, but the process is not limited to this, and the process corresponding to the process in the second or third embodiment may be executed. That is, in the case where the process corresponding to the process in the second embodiment is executed, the agent 1 accesses to the data servers 2 to 4 based on the information about updating posted by the data servers 2 to 4, and obtain the contents of the updated information. The agent 1 transmits the obtained contents of the updated information to the portable remote terminal 67 or the user terminal 7 via the portable telephone network N3. Moreover, in the case where the process corresponding to the process in the third embodiment is executed, the data servers 2 to 4 transmit the contents of the updated information to the agent 1. The agent 1 transmits the contents of the updated information to the portable remote terminal 67 and the user terminal 7 via the portable telephone network N3.

According to the eighth embodiment, the agent 1 posts the information about updating or the contents of the updated

information to the user terminal via the portable telephone network N3 which is a network other than the Internet N. Accordingly, the labor and time required in the user terminals 5 to 7 can be reduced, and the desired contents of the updated 5 information can be obtained quickly. Moreover, useless traffic on the Internet does not increase, and resources relating to the push service process can be reduced. Moreover, the expandability of the push service process can be heightened.

As explained above, according to one aspect of this 10 invention, a plurality of user terminals transmit information of the user terminals and requested various information to some of not less than one agents so as to execute the registration process. A plurality of data servers have various information and post information about updating of various information to 15 the agents. When the posted information about updating is the information about updating which is requested by the registered user terminals, the not less than one agents post the information about updating to the registered user terminals. The user terminals which have received the post access directly 20 to the data servers which hold contents of the updated information via the network based on the posted information about updating, and obtain the contents of the updated information. For this reason, the labor and time which are required for the user terminals can be reduced, and the desired 25 updated information contents can be obtained quickly.

Moreover, since the limited agents intervene in the network, useless traffic on the network does not increase, and resources to be required for the push service process can be reduced. Further, the expandability of the push service can be
5 heightened.

According to another aspect of this invention, a plurality of user terminals transmit information of the user terminals and requested various information to some of not less than one agents so as to execute the registration process. A
10 plurality of data servers have various information and post information about updating of various information to the agents. When the posted information about updating is the information about updating which is requested by the registered user terminals, the not less than one agents access to the data
15 servers which have posted the information about updating via the network, and obtain contents of the updated information, and post the contents of the updated information to the registered user terminals via the network. The user terminals which have received the post receive the posted contents of the
20 updated information, and obtain the contents of the updated information. For this reason, the labor and time which are required for the user terminals can be reduced, and the desired updated information contents can be obtained quickly. Moreover, since the limited agents intervene in the network,
25 useless traffic on the network does not increase, and resources

to be required for the push service process can be reduced. Further, the expandability of the push service can be heightened.

According to still another aspect of this invention, a plurality of user terminals transmit information of the user terminals and requested various information to some of not less than one agents so as to execute the registration process. A plurality of data servers have various information and post information about updating of various information to the agents.

10 When posted contents of the updated information is the information about updating which is requested by the registered user terminals, the not less than one agents post the contents of the updated information to the registered user terminals via the network. The user terminals which have received the post

15 receive the posted contents of the updated information and obtain it. For this reason, the labor and time which are required for the user terminals can be reduced, and the desired updated information contents can be obtained quickly. Moreover, since the limited agents intervene in the network,

20 useless traffic on the network does not increase, and resources to be required for the push service process can be reduced. Further, the expandability of the push service can be heightened.

Further, a plurality of user terminals transmit

25 information of the user terminals and requested various

information to some of the plurality of agents in the subnetwork connected to the network so as to execute the registration process. A plurality of data servers have various information and post information about updating of various information or contents of the updated information to the agents by means of broadcasting. When the posted information about updating or contents of the updated information is the information about updating which is requested by the registered user terminals, the agents post the information about updating or contents of the updated information to the registered user terminals via the network. The user terminals which have received the post access to the data servers which hold the contents of the updated information based on the posted information about updating and obtain the contents of the updated information, or receive the posted contents of the updated information so as to obtain them. For this reason, the labor and time which are required for the user terminals can be further reduced, and the desired updated information contents can be obtained quickly. Moreover, since the limited agents intervene in the network, useless traffic on the network does not increase, and resources to be required for the push service process can be reduced. Further, the expandability of the push service can be heightened.

Further, a plurality of user terminals transmit information of the user terminals and requested various information to representative agent connected to the network.

The representative agent transmit the information about user terminals and the request various information suitably to some of the plurality of agents in the subnetwork so as to execute the registration process. A plurality of data servers have various information and post information about updating of various information or contents of the updated information to the representative agent. The representative agent posts them to the agent by means of broadcasting. When the posted information about updating or contents of the updated information is the information about updating which is requested by the registered user terminals, the agents post the information about updating or contents of the updated information to the registered user terminals via the representative agent or the network. The user terminals which have received the post access to the data servers which hold the contents of the updated information based on the posted information about updating and obtain the contents of the updated information, or receive the posted contents of the updated information so as to obtain them. For this reason, the labor and time which are required for the user terminals can be further reduced, and the desired updated information contents can be obtained quickly. Moreover, since the limited agents intervene in the network, useless traffic on the network does not increase, and resources to be required for the push service process can be reduced. Particularly since the

representative agent can execute the registration process for the agents flexibly, the expandability of the push service can be heightened.

Further, a plurality of user terminals transmit
5 information of the user terminals and requested various information to agents which are locally connected to providers connecting the user terminals so as to execute the registration process. A plurality of data servers have various information, and IP-multi-cast and post information about updating of
10 various information or contents of the updated information to the agents via the provider. When the posted information about updating or contents of the updated information is the information about updating which is requested by the registered user terminals, the agents post the information about updating
15 or contents of the updated information to the registered user terminals. The user terminals which have received the post access to the data servers which hold the contents of the updated information based on the posted information about updating and obtain the contents of the updated information, or receive the
20 posted contents of the updated information so as to obtain them. For this reason, the labor and time which are required for the user terminals can be further reduced, and the desired updated information contents can be obtained quickly. Moreover, since the limited agents intervene in the network, useless traffic
25 on the network does not increase, and resources to be required

for the push service process can be reduced. Particularly since the representative agent can execute the registration process for the agents flexibly, the expandability of the push service can be heightened.

5 Further, a plurality of user terminals transmit information of the user terminals and requested various information to a high-hierarchical agent which is locally connected to the provider connecting the user so as to execute the registration process. The high-hierarchical agent
10 transmits the information of the registered user terminals and requested various information to a higher-hierarchical agent so as to execute a registration process. A plurality of data servers have various information, and IP-multi-cast and post information about updating of various information or contents
15 of the updated information to the highest-hierarchical agents via the provider. When the posted information about updating or contents of the updated information is the information about updating which is requested by the registered user terminals, the highest-hierarchical agents post the information about
20 updating to the registered user terminals or the contents of the updated information to the low-hierarchical agents. When the posted information about updating and contents of the updated information is information about updating requested by the registered user terminals, the low-hierarchical agents
25 which have received the post the information about updating to

the registered user terminals or contents of the updated information to the low-hierarchical agents or the user terminals. When the low-hierarchical agents have lower-hierarchical agents, the posting process which is similar to
5 the low-hierarchical agents is executed. The user terminals access to the data servers which hold the contents of the updated information based on the posted information about updating and obtain the contents of the updated information, or receive the posted contents of the updated information so as to obtain them.
10 For this reason, the labor and time which are required for the user terminals can be further reduced, and the desired updated information contents can be obtained quickly. Moreover, since the limited agents intervene in the network, useless traffic on the network does not increase, and resources to be required
15 for the push service process can be reduced. Particularly since the representative agent can execute the registration process for the agents flexibly, the expandability of the push service can be heightened.

Further, a plurality of user terminals transmit
20 information of the user terminals and requested various information to some of not less than one agents so as to execute the registration process. A plurality of data servers have various information and post information about updating of various information to the agents. When the posted information
25 about updating is the information about updating which is

requested by the registered user terminals, the not less than one agents post the information about updating to the registered user terminals via a network different from the above-mentioned network, such as a portable telephone network. The user terminals which have received the post access directly to the data servers which hold contents of the updated information via the network based on the posted information about updating, and obtain the contents of the updated information. For this reason, the labor and time which are required for the user terminals can be reduced, and the desired updated information contents can be obtained quickly regardless of locations of the users. Moreover, since the limited agents intervene in the network, useless traffic on the network does not increase, and resources to be required for the push service process can be reduced. Further, the expandability of the push service can be heightened.

Further, when not less than one agents accept the post that various information is provided from a data server which is not registered in a list table of data servers which provide various information, the agents automatically register the unregistered data server into the list table. For this reason, the scope of the push service process can be automatically expanded.

Further, when not less than one agents accept the post of management contents of various information managed by data

5 servers which provide the various information, the agents automatically add or delete data servers in data type management information based on the posted management contents. For this reason, the scope of the push service process to be executed by the not less than one agents is automatically optimized.

10 Further, not less than one agents accept the post of information about adding or deleting data types of various information managed by data servers which provide the various information, the agents add or delete data servers which relate to the data types to be added or deleted to/from the data servers in data type management information. For this reason, the scope of the push service process to be executed by the not less than one agents is automatically optimized.

15 Further, when data types to be managed are changed, not less than one agents post the change of the data types to registered user terminals. For this reason, the scope of the push service process to be executed by the not less than one agents is automatically optimized, and the user terminals can immediately recognize the change of the data types which change dynamically and can be obtained.

25 Further, data types are managed in a hierarchical relationship and when the data types are changed, not less than one agents post the change of the data types to user terminals in which data types with lower hierarchy than that of the changed data types. For this reason, the scope of the push service

process to be executed by the not less than one agents is automatically optimized, and even if the data types are managed in the hierarchical relationship, the user terminals can immediately recognize the change of the data types which change
5 dynamically and can be obtained.

According to still another aspect of this invention, information of the user terminals connected to a network using an Internet protocol and various information which is requested to be posted by the user terminals are registered into agents,
10 which are connected to the network and are substitute for the user terminals, at a registration step. A plurality of data servers which are connected to the network and hold various information post information about updating of the various information to the agents via the network at a first post step.
15 When the agents accept the information about updating posted by the data servers and the information about updating is information about updating requested by the registered user terminals, the agents post the information about updating to the registered user terminals via the network at a second post
20 step. The user terminals accept the post of the information about updating from the agents at a obtaining step. The user terminals accept to the data servers which have posted the information about updating at the first post step via the network so as to obtain contents of the updated information.
25 For this reason, the labor and time which are required for the

user terminals can be reduced, and the desired updated information contents can be obtained quickly. Moreover, since the limited agents intervene in the network, useless traffic on the network does not increase, and resources to be required for the push service process can be reduced. Further, the expandability of the push service can be heightened.

According to still another aspect of this invention, information of the user terminals connected to a network using an Internet protocol and various information which is requested to be posted by the user terminals are registered into agents, which are connected to the network and are substitute for the user terminals, at a registration step. A plurality of data servers which are connected to the network and hold various information post information about updating of the various information to the agents via the network at a first post step. When the agents accept the information about updating posted by the data servers and the information about updating is information about updating requested by the registered user terminals, the agents access to the data servers which have posted the information about updating via the network so as to obtain contents of the updated information at an obtaining step. The agents post the contents of the updated information obtained at the obtaining step to the registered user terminals via the network at a second post step. For this reason, the labor and time which are required for the user terminals can be reduced,

and the desired updated information contents can be obtained quickly. Moreover, since the limited agents intervene in the network, useless traffic on the network does not increase, and resources to be required for the push service process can be
5 reduced. Further, the expandability of the push service can be heightened.

According to still another aspect of this invention, information of the user terminals connected to a network using an Internet protocol and various information which is requested
10 to be posted by the user terminals are registered into agents, which are connected to the network and are substitute for the user terminals, at a registration step. A plurality of data servers which are connected to the network and hold various information post contents of the updated various information
15 to the agents via the network at a first post step. When the agents accept the information about updating of the various information posted by the data servers and the information about updating is information about updating requested by the registered user terminals, the agents post the contents of the
20 updated information to the registered user terminals via the network at a second post step. For this reason, the labor and time which are required for the user terminals can be reduced, and the desired updated information contents can be obtained quickly. Moreover, since the limited agents intervene in the
25 network, useless traffic on the network does not increase, and

resources to be required for the push service process can be reduced. Further, the expandability of the push service can be heightened.

Further, agents post information about updating or
5 contents of updated information, which are posted by data
servers via a network other than the above network, such as a
portable telephone network to user terminals. For this reason,
the labor and time which are required for the user terminals
can be reduced, and the desired updated information contents
10 can be obtained quickly regardless of locations of users.

Further, when not less than one agents accept the post
that various information is provided from a data server which
is unregistered in a list table for managing a list of data
servers for providing the various information, the agents
15 automatically register the data server into the list table. For
this reason, the scope of the push service process can be
automatically expanded.

Further, when not less than one agents accept the post
of management contents of various information managed by data
20 servers which provide the various information, the agents
automatically add or delete data servers in data type management
information managed per data type based on the posted management
contents. For this reason, the scope of the push service
process to be executed by the not less than one agents is
25 automatically optimized.

Further, not less than one agents accept the post of information about adding or deleting data types of various information managed by data servers which provide the various information, the agents automatically add or delete data servers which relate to the data types to be added or deleted to/from the data servers in data type management information for managing the various information per data type. For this reason, the scope of the push service process to be executed by the not less than one agents is automatically optimized.

10 Further, when data types to be managed are changed, not less than one agents automatically post the change of the data types to the user terminals. For this reason, the scope of the push service process to be executed by the not less than one agents is automatically optimized, and the user terminals can
15 immediately recognize the changing of the data types which change dynamically and can be obtained.

Further, data types are managed in a hierarchical relationship and when the data types are changed, not less than one agents post the change of the data types to user terminals
20 in which data types with lower hierarchy than that of the changed data types. For this reason, the scope of the push service process to be executed by the not less than one agents is automatically optimized, and even if the data types are managed in the hierarchical relationship, the user terminals can
25 immediately recognize the change of the data types which change

dynamically and can be obtained.

Although the invention has been described with respect to a specific embodiment for a complete and clear disclosure, the appended claims are not to be thus limited but are to be
5 construed as embodying all modifications and alternative constructions that may occur to one skilled in the art which fairly fall within the basic teaching herein set forth.

WHAT IS CLAIMED IS:

1. A push service system comprising:

a plurality of data servers connected to a network using an Internet protocol and have various information, and post
5 information about updating of the various information to agents which are substitute for user terminals connected to the network via said network;

at least one agent connected to said network, wherein said agent accepts the information about updating of the various
10 information posted by said data servers, wherein when the information about updating is an information about updating requested by registered user terminals said agent posts the information about updating to said registered user terminals via said network; and

15 a plurality of user terminals connected to said network, wherein said user terminals accept the post of the information about updating from said registered agents, and access said data servers which have posted the information about updating via said network so as to obtain contents of the updated
20 information.

2. The push service system according to claim 1, wherein said agent is composed of a plurality of agents in a subnetwork connected to said network, and said user terminals register
25 themselves into the plurality of agents, and said agent executes

a representative process for said registered user terminals.

3. The push service system according to claim 2, wherein a representative agent is provided between said network and said subnetwork, and said representative agent executes a transit process between said data servers and said agent in said subnetwork and between said user terminals and said agent in said subnetwork.

4. The push service system according to claim 1, wherein said agent is locally connected to at least one provider, said provider being connected to said network, said user terminals being connected to said provider, wherein said data servers post the information about updating or the contents of the updated information to said agent via said provider, and said agent posts the information about updating or the contents of the updated information to said user terminals via said providers.

5. The push service system according to claim 4, wherein said provider is composed of a plurality of providers having a hierarchical relationship, said user terminals and said agent having high-hierarchical agents register the information about said user terminals and requested various information into said agent connected to rightly above provider, said agent having the highest-hierarchical agents and low-hierarchical agent

post the information about updating or the contents of the updated information posted from said data servers to agents which lower hierarchically connect user terminals which have made the request.

5

6. The push service system according to claim 1, wherein said agent posts the information about updating or the contents of the updated information to said registered user terminals via a network which is different from said network.

10

7. The push service system according to claim 1, wherein said agent have a list table of data servers that provide the various information, and when said agent accepts the post that the various information is provided from a data server which is not registered in the list table said agent executes a process for additionally registering said data server into the list table.

8. The push service system according to claim 1, wherein said agent further has data type management information for managing the various information per data type, and when said agent accepts the post that management contents of the various information which are managed by said data servers from said data servers that provide the various information said agent adds or deletes said data servers from the data type management information based on the posted management contents.

25

9. The push service system according to claim 8, wherein when said agent receives the post of the information about adding or deleting the data types of the various information managed by said data servers from said data servers that provide the
5 various information, said agent adds or deletes said data servers relating to the data types to be added or deleted to/from said data servers in the data type management information.

10. The push service system according to claim 8, wherein when
10 the data types in management are changed, said agent posts the change of the data types to said user terminals.

11. The push service system according to claim 10, wherein when said agent manages the data types in a hierarchical
15 relationship, and when the data type is changed said agent posts the change of the data types to said user terminals where a low-hierarchical data type of the changed data types is registered.

20 12. A push service system comprising:

a plurality of data servers connected to a network using an Internet protocol and have various information, and post information about updating of the various information to agents which are substitute for user terminals connected to the network
25 via said network;

at least agent connected to said network, wherein said agent accepts the information about updating of the various information posted by said data servers, wherein when the information about updating is an information about updating requested by registered user terminals said agent accesses said data servers which have posted the information about updating via said network so as to obtain contents of the updated information, and posts the contents of the updated information to said registered user terminals via said network; and

10 a plurality of user terminals connected to said network, wherein said user terminals receive the contents of the updated information from said registered agents so as to obtain the contents of the updated information.

15 13. The push service system according to claim 12, wherein said agent is composed of a plurality of agents in a subnetwork connected to said network, and said user terminals register themselves into the plurality of agents, and said agent executes a representative process for said registered user terminals.

20 14. The push service system according to claim 13, wherein a representative agent is provided between said network and said subnetwork, and said representative agent executes a transit process between said data servers and said agent in said
25 subnetwork and between said user terminals and said agent in

said subnetwork.

15. The push service system according to claim 12, wherein
said agent is locally connected to at least one provider, said
5 provider being connected to said network, said user terminals
being connected to said provider, wherein said data servers post
the information about updating or the contents of the updated
information to said agent via said provider, and said agent
posts the information about updating or the contents of the
10 updated information to said user terminals via said providers.

16. The push service system according to claim 15, wherein
said provider is composed of a plurality of providers having
a hierarchical relationship, said user terminals and said agent
15 having high-hierarchical agents register the information about
said user terminals and requested various information into said
agent connected to rightly above provider, said agent having
the highest-hierarchical agents and low-hierarchical agent
post the information about updating or the contents of the
20 updated information posted from said data servers to agents
which lower hierarchically connect user terminals which have
made the request.

17. The push service system according to claim 12, wherein said agent posts the information about updating or the contents of the updated information to said registered user terminals via a network which is different from said network.

5

18. The push service system according to claim 12, wherein said agent have a list table of data servers that provide the various information, and when said agent accepts the post that the various information is provided from a data server which is not registered in the list table said agent executes a process for additionally registering said data server into the list table.

19. The push service system according to claim 12, wherein said agent further has data type management information for managing the various information per data type, and when said agent accepts the post that management contents of the various information which are managed by said data servers from said data servers that provide the various information said agent adds or deletes said data servers from the data type management information based on the posted management contents.

20. The push service system according to claim 19, wherein when said agent receives the post of the information about adding or deleting the data types of the various information

managed by said data servers from said data servers that provide the various information, said agent adds or deletes said data servers relating to the data types to be added or deleted to/from said data servers in the data type management information.

5

21. The push service system according to claim 19, wherein when the data types in management are changed, said agent posts the change of the data types to said user terminals.

10 22. The push service system according to claim 21, wherein when said agent manages the data types in a hierarchical relationship, and when the data type is changed said agent posts the change of the data types to said user terminals where a low-hierarchical data type of the changed data types is
15 registered.

23. A push service system comprising:

a plurality of data servers connected to a network using an Internet protocol and have various information, and post
20 information about updating of the various information to agents which are substitute for user terminals connected to the network via said network;

at least one agent connected to said network, wherein said agent accepts the contents of the updated various information
25 posted by said data servers, wherein when the contents of the

updated information is an information about updating requested by registered user terminals said agent posts the contents of the updated information to said registered user terminals via said network; and

5 a plurality of user terminals connected to said network, wherein said user terminals receive the contents of the updated information from said registered agents so as to obtain the contents of the updated information.

10 24. The push service system according to claim 23, wherein said agent is composed of a plurality of agents in a subnetwork connected to said network, and said user terminals register themselves into the plurality of agents, and said agent executes a representative process for said registered user terminals.

15 25. The push service system according to claim 24, wherein a representative agent is provided between said network and said subnetwork, and said representative agent executes a transit process between said data servers and said agent in said
20 subnetwork and between said user terminals and said agent in said subnetwork.

 26. The push service system according to claim 23, wherein said agent is locally connected to at least one provider, said
25 provider being connected to said network, said user terminals

being connected to said provider, wherein said data servers post the information about updating or the contents of the updated information to said agent via said provider, and said agent posts the information about updating or the contents of the updated information to said user terminals via said providers.

27. The push service system according to claim 26, wherein said provider is composed of a plurality of providers having a hierarchical relationship, said user terminals and said agent having high-hierarchical agents register the information about said user terminals and requested various information into said agent connected to rightly above provider, said agent having the highest-hierarchical agents and low-hierarchical agent post the information about updating or the contents of the updated information posted from said data servers to agents which lower hierarchically connect user terminals which have made the request.

28. The push service system according to claim 23, wherein said agent posts the information about updating or the contents of the updated information to said registered user terminals via a network which is different from said network.

29. The push service system according to claim 23, wherein said agent have a list table of data servers that provide the various information, and when said agent accepts the post that the various information is provided from a data server which is not registered in the list table said agent executes a process for additionally registering said data server into the list table.

30. The push service system according to claim 23, wherein said agent further has data type management information for managing the various information per data type, and when said agent accepts the post that management contents of the various information which are managed by said data servers from said data servers that provide the various information said agent adds or deletes said data servers from the data type management information based on the posted management contents.

31. The push service system according to claim 30, wherein when said agent receives the post of the information about adding or deleting the data types of the various information managed by said data servers from said data servers that provide the various information, said agent adds or deletes said data servers relating to the data types to be added or deleted to/from said data servers in the data type management information.

32. The push service system according to claim 30, wherein when the data types in management are changed, said agent posts the change of the data types to said user terminals.

5 33. The push service system according to claim 32, wherein when said agent manages the data types in a hierarchical relationship, and when the data type is changed said agent posts the change of the data types to said user terminals where a low-hierarchical data type of the changed data types is
10 registered.

34. A push service processing method, comprising:

the registration step of registering information about user terminals connected to a network using an Internet protocol
15 and various information which is requested to be posted by the user terminals into agents which are connected to the network and are substitute for the user terminals;

the first post step that a plurality of data servers which are connected to the network and have various information post
20 information about updating of the various information to the agents via the network;

the second post step that when the agents receive the information about updating posted by the plurality of data servers and the information about updating is information about
25 updating requested by registered user terminals, the agents

post the information about updating to the registered user terminals via the network; and

the obtaining step that the user terminals receive the post of the information about updating from the agents, and
5 access to the data servers which have posted the information about updating at the first post step via the network so as to obtain contents of updated information.

35. The push service processing method according to claim 34,
10 wherein at the second post step the agents post the information about updating or the contents of the updated information to the user terminals via another network.

36. The push service processing method according to claim 34,
15 further comprising the first processing step that when the not less than one agents accept the post that the various information is provided from a data server which is not registered into a list table for managing a list of the data servers for providing the various information, the agents
20 additionally register said data server into the list table.

37. The push service processing method according to claim 34, further comprising the second processing step that when the not less than one agents accept the post of management contents of
25 the various information managed by data servers for providing

the various information from said data servers, the agents add or delete the data servers in the data type management information for managing the various information per data type based on the posted management contents.

5

38. The push service processing method according to claim 34, further comprising the third processing step that when the not less than one agents accept the information about adding or deleting the data types of the various information managed by data servers for providing the various information from said data servers, the agents add or delete data servers relating to the data types to be added or deleted to/from the data servers in the data type management information for managing the various information per data type.

15

39. The push service processing method according to claim 34, further comprising the third post step that when the data types in management are changed, the not less than one agents post the change of the data types to the user terminals.

20

40. The push service processing method according to claim 39, further comprising the fourth post step that when the data types are managed in a hierarchical relationship and the data types are changed, the not less than one agents post the change of the data types to user terminals which register a low-

25

hierarchical data type of the changed data types.

41. A push service processing method, comprising:

the registration step of registering information about
5 user terminals connected to a network using an Internet protocol
and various information which is requested to be posted by the
user terminals into agents which are connected to the network
and are substitute for the user terminals;

the first post step that a plurality of data servers which
10 are connected to the network and have various information post
information about updating of the various information to the
agents via the network;

the obtaining step that when the agents receive the
information about updating posted by the plurality of data
15 servers and the information about updating is information about
updating requested by registered user terminals, the agents
access to the data servers which have posted the information
about updating via the network so as to obtain contents of the
updated information; and

20 the second post step of posting the contents of the
updated information obtained at the obtaining step to the
registered user terminals via the network.

42. The push service processing method according to claim 41, wherein at the second post step the agents post the information about updating or the contents of the updated information to the user terminals via another network.

5

43. The push service processing method according to claim 41, further comprising the first processing step that when the not less than one agents accept the post that the various information is provided from a data server which is not
10 registered into a list table for managing a list of the data servers for providing the various information, the agents additionally register said data server into the list table.

44. The push service processing method according to claim 41,
15 further comprising the second processing step that when the not less than one agents accept the post of management contents of the various information managed by data servers for providing the various information from said data servers, the agents add or delete the data servers in the data type management
20 information for managing the various information per data type based on the posted management contents.

45. The push service processing method according to claim 41, further comprising the third processing step that when the not
25 less than one agents accept the information about adding or

deleting the data types of the various information managed by data servers for providing the various information from said data servers, the agents add or delete data servers relating to the data types to be added or deleted to/from the data servers
5 in the data type management information for managing the various information per data type.

46. The push service processing method according to claim 41, further comprising the third post step that when the data types
10 in management are changed, the not less than one agents post the change of the data types to the user terminals.

47. The push service processing method according to claim 46, further comprising the fourth post step that when the data types
15 are managed in a hierarchical relationship and the data types are changed, the not less than one agents post the change of the data types to user terminals which register a low-hierarchical data type of the changed data types.

20 48. A push service processing method, comprising:
the registration step of registering information about user terminals connected to a network using an Internet protocol and various information which is requested to be posted by the user terminals into agents which are connected to the network
25 and are substitute for the user terminals;

the first post step that a plurality of data servers which are connected to the network and have various information post contents of updated various information to the agents via the network; and

5 the second post step that when the agents receive the contents of the updated various information posted by the plurality of data servers and the contents of the updated information are information about updating requested by the registered user terminals, the agents post the contents of the
10 updated information to the registered user terminals via the network.

49. The push service processing method according to claim 48, wherein at the second post step the agents post the information
15 about updating or the contents of the updated information to the user terminals via another network.

50. The push service processing method according to claim 48, further comprising the first processing step that when the not
20 less than one agents accept the post that the various information is provided from a data server which is not registered into a list table for managing a list of the data servers for providing the various information, the agents additionally register said data server into the list table.

51. The push service processing method according to claim 48, further comprising the second processing step that when the not less than one agents accept the post of management contents of the various information managed by data servers for providing
5 the various information from said data servers, the agents add or delete the data servers in the data type management information for managing the various information per data type based on the posted management contents.

10 52. The push service processing method according to claim 48, further comprising the third processing step that when the not less than one agents accept the information about adding or deleting the data types of the various information managed by data servers for providing the various information from said
15 data servers, the agents add or delete data servers relating to the data types to be added or deleted to/from the data servers in the data type management information for managing the various information per data type.

20 53. The push service processing method according to claim 48, further comprising the third post step that when the data types in management are changed, the not less than one agents post the change of the data types to the user terminals.

54. The push service processing method according to claim 53, further comprising the fourth post step that when the data types are managed in a hierarchical relationship and the data types are changed, the not less than one agents post the change of
5 the data types to user terminals which register a low-hierarchical data type of the changed data types.

55. A push service system comprising:
a plurality of data servers; at least one agent; and a
10 plurality of user terminals,

wherein said data servers, said agent and said user terminals being connected to a network which uses an Internet protocol,

wherein said data servers store various information, and
15 if particular information is updated then said data servers send a notice indicating that the particular information is updated to said agent through said network,

wherein information about said user terminals and information required by each of said user terminals about
20 updating of particular information is registered in said agent in a correlated fashion,

wherein when said agent receives the notice about updating of some particular information from any of said data servers and if that particular information has been registered
25 in said agent in correlation to a user terminal then said agent

dispatches the notice about updating of that particular information to that particular user terminal

wherein said particular user terminal access said data server that has sent the notice to said agent and obtains the
5 contents of update from said data server.

ABSTRACT OF THE DISCLOSURE

A push service system is provided with data servers which are connected to an Internet and post information about updating information in storage sections to an agent, an agent which is
5 connected to the Internet and when the information about updating is information about updating requested by registered user terminals, post the information about updating to the registered user terminals, and the user terminals which are connected to the Internet and receives the information about
10 updating from the agent and access to the data servers which have posted the information about updating so as to obtain contents of the updated information.

FIG.1



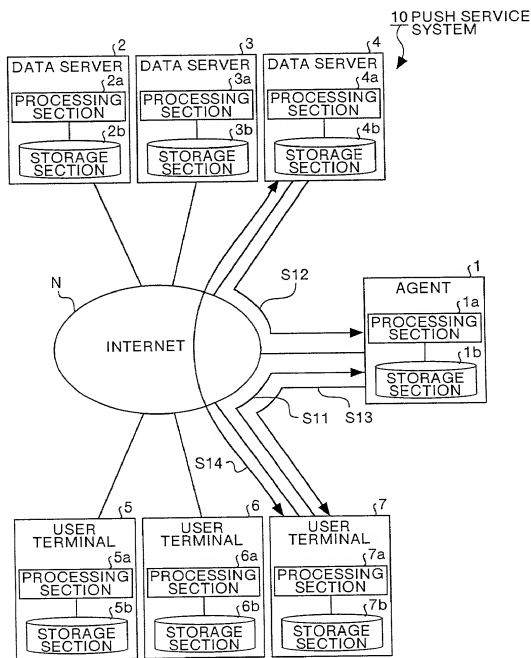


FIG.2

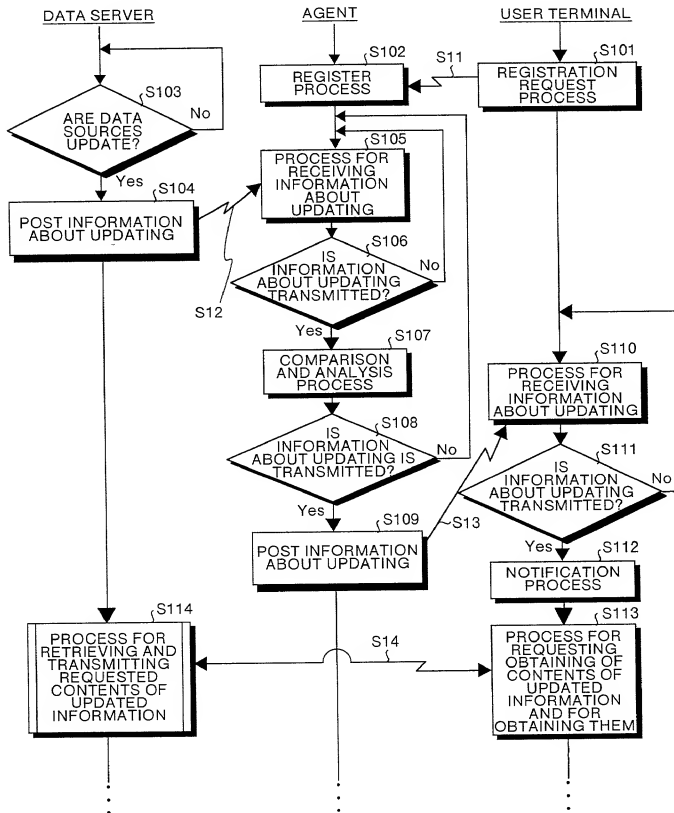

RETURN

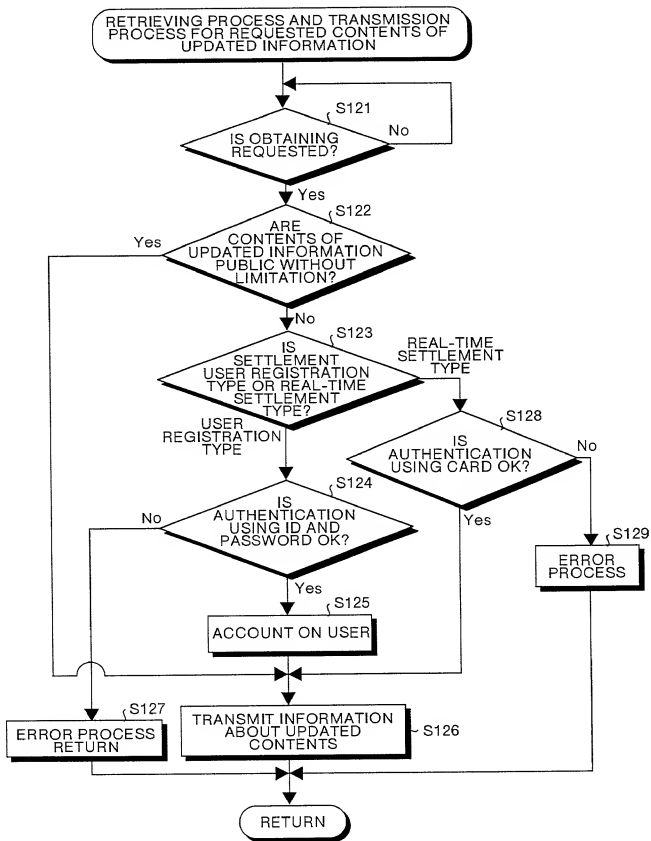

AT THE TIME OF REGISTRATION INTO AGENT

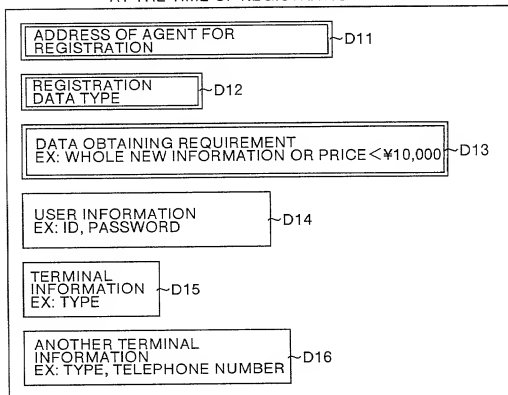


FIG.4A

AT THE TIME OF ACCESSING TO DATA SERVER

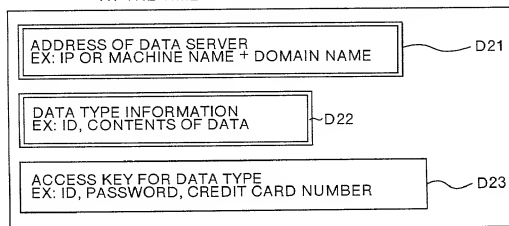


FIG.4B

FIG.5A

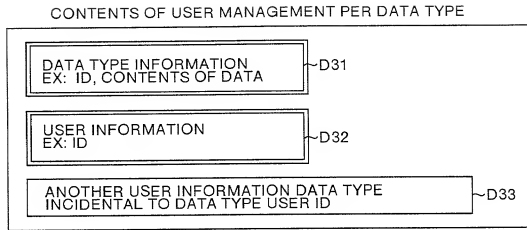


FIG.5B

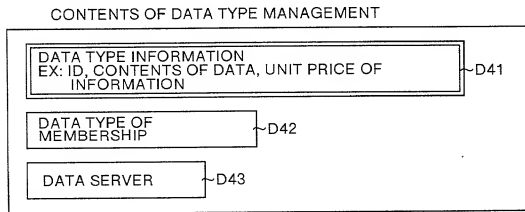


FIG.5C

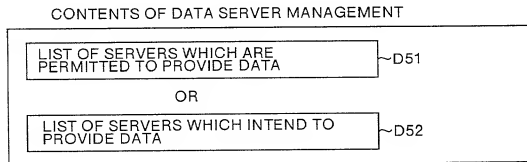


FIG.6

CONTENTS OF DATA TYPE MANAGEMENT IN DATA SERVER

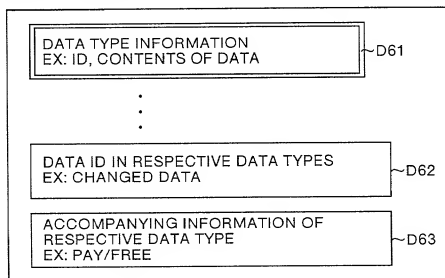


FIG. 7

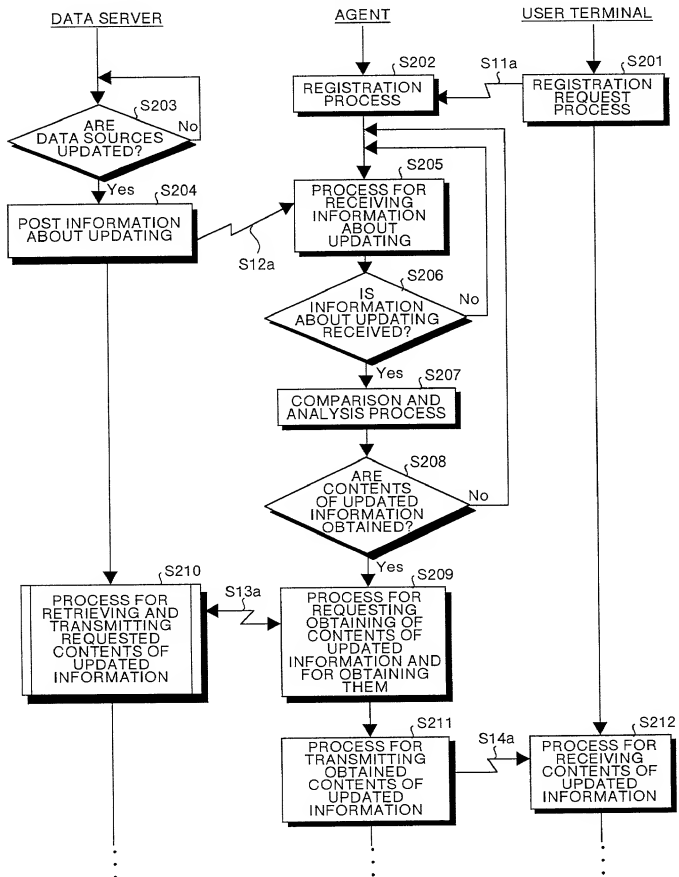


FIG.8

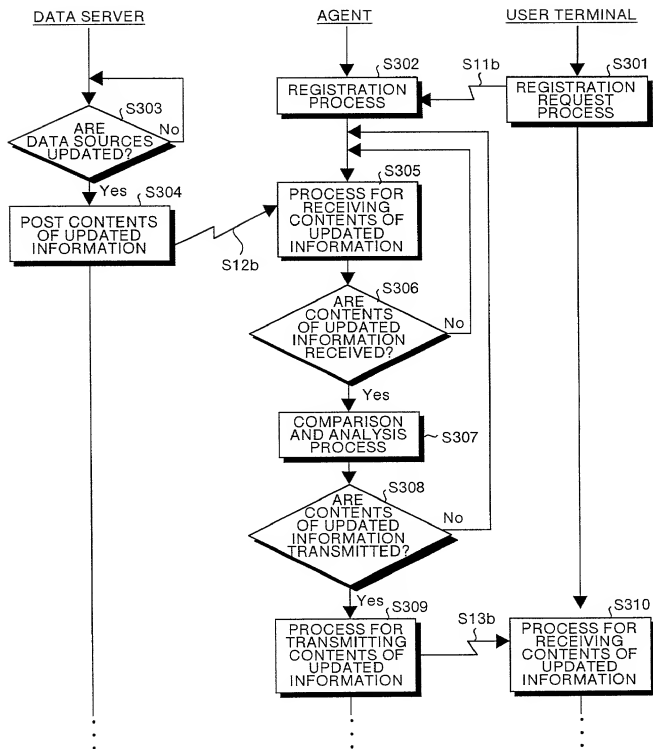


FIG. 9

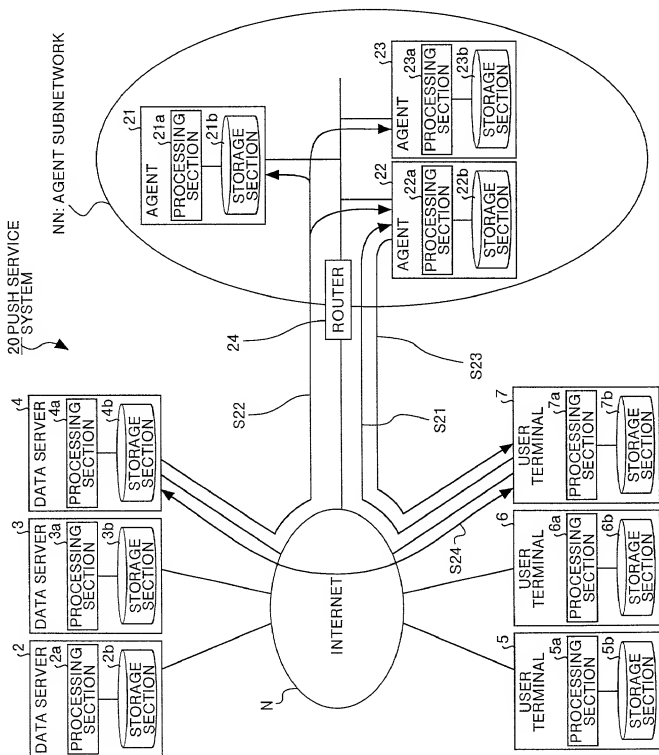


FIG.10


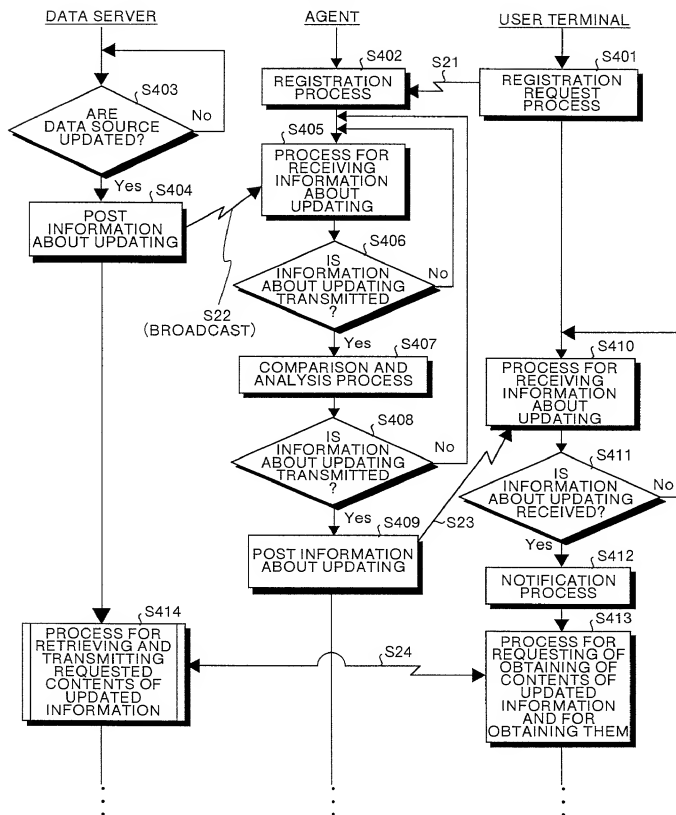


FIG. 11

30 PUSH SERVICE
SYSTEM

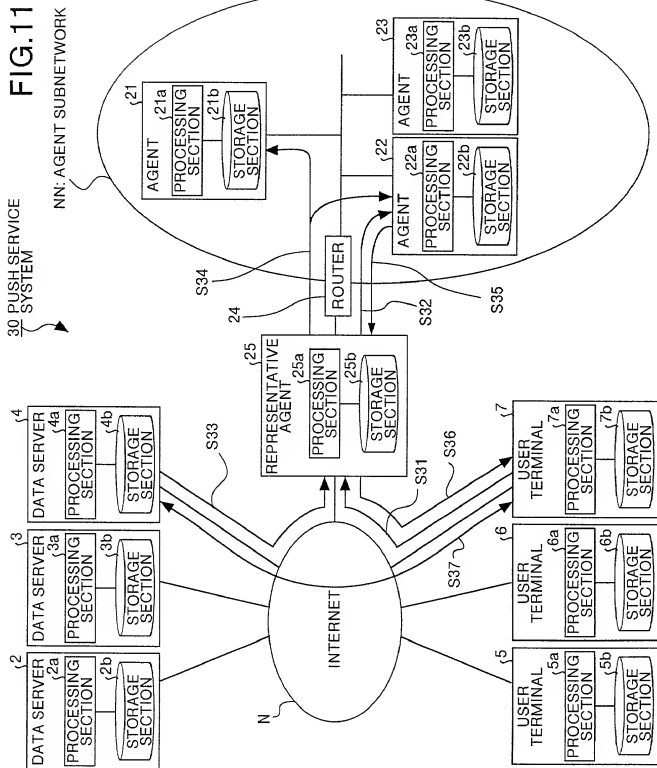

1. $\frac{1}{2}$ of 100 = 50
 2. $\frac{1}{4}$ of 100 = 25
 3. $\frac{1}{8}$ of 100 = 12.5
 4. $\frac{1}{16}$ of 100 = 6.25
 5. $\frac{1}{32}$ of 100 = 3.125
 6. $\frac{1}{64}$ of 100 = 1.5625
 7. $\frac{1}{128}$ of 100 = 0.78125
 8. $\frac{1}{256}$ of 100 = 0.390625
 9. $\frac{1}{512}$ of 100 = 0.1953125
 10. $\frac{1}{1024}$ of 100 = 0.09765625
 11. $\frac{1}{2048}$ of 100 = 0.048828125
 12. $\frac{1}{4096}$ of 100 = 0.0244140625
 13. $\frac{1}{8192}$ of 100 = 0.01220703125
 14. $\frac{1}{16384}$ of 100 = 0.006103515625
 15. $\frac{1}{32768}$ of 100 = 0.0030517578125
 16. $\frac{1}{65536}$ of 100 = 0.00152587890625
 17. $\frac{1}{131072}$ of 100 = 0.000762939453125
 18. $\frac{1}{262144}$ of 100 = 0.0003814697265625
 19. $\frac{1}{524288}$ of 100 = 0.00019073486328125
 20. $\frac{1}{1048576}$ of 100 = 9.5367431640625e-05
 21. $\frac{1}{2097152}$ of 100 = 4.76837158203125e-05
 22. $\frac{1}{4194304}$ of 100 = 2.384185791015625e-05
 23. $\frac{1}{8388608}$ of 100 = 1.1920928955078125e-05
 24. $\frac{1}{16777216}$ of 100 = 5.9604644775390625e-06
 25. $\frac{1}{33554432}$ of 100 = 2.9802322387695312e-06
 26. $\frac{1}{67108864}$ of 100 = 1.4901161193847656e-06
 27. $\frac{1}{134217728}$ of 100 = 7.450580596923828e-07
 28. $\frac{1}{268435456}$ of 100 = 3.725290298461914e-07
 29. $\frac{1}{536870912}$ of 100 = 1.862645149230957e-07
 30. $\frac{1}{1073741824}$ of 100 = 9.313225746154785e-08
 31. $\frac{1}{2147483648}$ of 100 = 4.656612873077392e-08
 32. $\frac{1}{4294967296}$ of 100 = 2.328306436538696e-08
 33. $\frac{1}{8589934592}$ of 100 = 1.164153218269348e-08
 34. $\frac{1}{17179869184}$ of 100 = 5.82076609134674e-09
 35. $\frac{1}{34359738368}$ of 100 = 2.91038304567337e-09
 36. $\frac{1}{68719476736}$ of 100 = 1.455191522836685e-09
 37. $\frac{1}{137438953472}$ of 100 = 7.275957614183425e-10
 38. $\frac{1}{274877906944}$ of 100 = 3.637978807091712e-10
 39. $\frac{1}{549755813888}$ of 100 = 1.818989403545856e-10
 40. $\frac{1}{1099511627776}$ of 100 = 9.09494701772928e-11
 41. $\frac{1}{2199023255552}$ of 100 = 4.54747350886464e-11
 42. $\frac{1}{4398046511104}$ of 100 = 2.27373675443232e-11
 43. $\frac{1}{8796093022208}$ of 100 = 1.13686837721616e-11
 44. $\frac{1}{17592186044416}$ of 100 = 5.6843418860808e-12
 45. $\frac{1}{35184372088832}$ of 100 = 2.8421709430404e-12
 46. $\frac{1}{70368744177664}$ of 100 = 1.4210854715202e-12
 47. $\frac{1}{140737488355328}$ of 100 = 7.105427357601e-13
 48. $\frac{1}{281474976710656}$ of 100 = 3.5527136788005e-13
 49. $\frac{1}{562949953421312}$ of 100 = 1.77635683940025e-13
 50. $\frac{1}{1125899906842624}$ of 100 = 8.88178419700125e-14
 51. $\frac{1}{2251799813685248}$ of 100 = 4.440892098500625e-14
 52. $\frac{1}{4503599627370496}$ of 100 = 2.2204460492503125e-14
 53. $\frac{1}{9007199254740992}$ of 100 = 1.1102230246251562e-14
 54. $\frac{1}{18014398509481984}$ of 100 = 5.551115123125781e-15
 55. $\frac{1}{36028797018963968}$ of 100 = 2.7755575615628906e-15
 56. $\frac{1}{72057594037927936}$ of 100 = 1.3877787807814453e-15
 57. $\frac{1}{144115188075855872}$ of 100 = 6.938893903907226e-16
 58. $\frac{1}{288230376151711744}$ of 100 = 3.469446951953613e-16
 59. $\frac{1}{576460752303423488}$ of 100 = 1.7347234759768065e-16
 60. $\frac{1}{1152921504606846976}$ of 100 = 8.673617379884032e-17
 61. $\frac{1}{2305843009213693952}$ of 100 = 4.336808689942016e-17
 62. $\frac{1}{4611686018427387904}$ of 100 = 2.168404344971008e-17
 63. $\frac{1}{9223372036854775808}$ of 100 = 1.084202172485504e-17
 64. $\frac{1}{18446744073709551616}$ of 100 = 5.42101086242752e-18
 65. $\frac{1}{36893488147419103232}$ of 100 = 2.71050543121376e-18
 66. $\frac{1}{73786976294838206464}$ of 100 = 1.35525271560688e-18
 67. $\frac{1}{147573952589676412928}$ of 100 = 6.7762635780344e-19
 68. $\frac{1}{295147905179352825856}$ of 100 = 3.3881317890172e-19
 69. $\frac{1}{590295810358705651712}$ of 100 = 1.6940658945086e-19
 70. $\frac{1}{1180591620717411303424}$ of 100 = 8.470329472543e-20
 71. $\frac{1}{2361183241434822606848}$ of 100 = 4.2351647362715e-20
 72. $\frac{1}{4722366482869645213696}$ of 100 = 2.11758236813575e-20
 73. $\frac{1}{9444732965739290427392}$ of 100 = 1.058791184067875e-20
 74. $\frac{1}{18889465931478580854784}$ of 100 = 5.293955920339375e-21
 75. $\frac{1}{37778931862957161709568}$ of 100 = 2.6469779601696

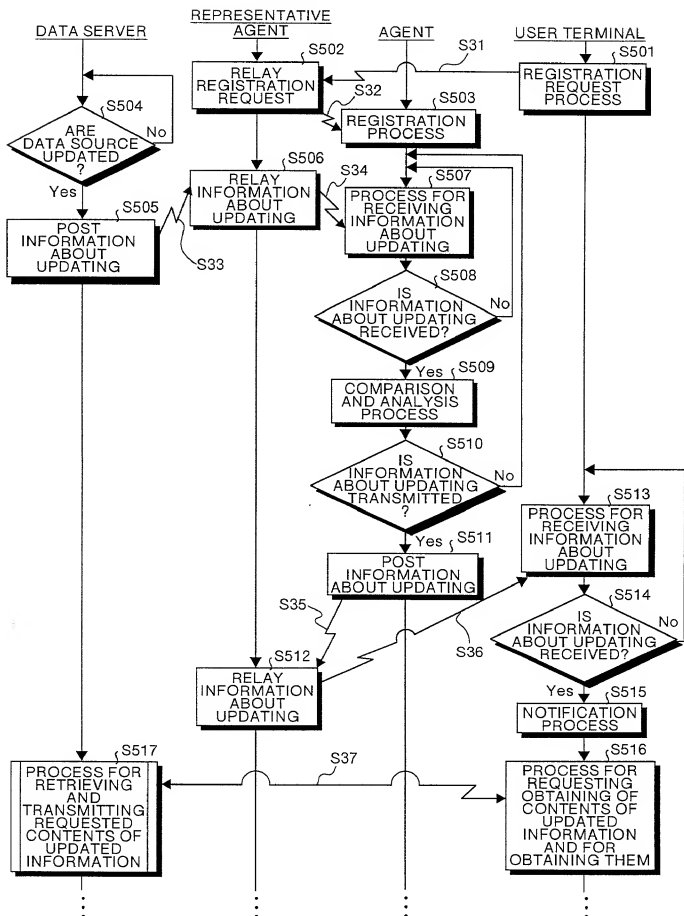


FIG.13

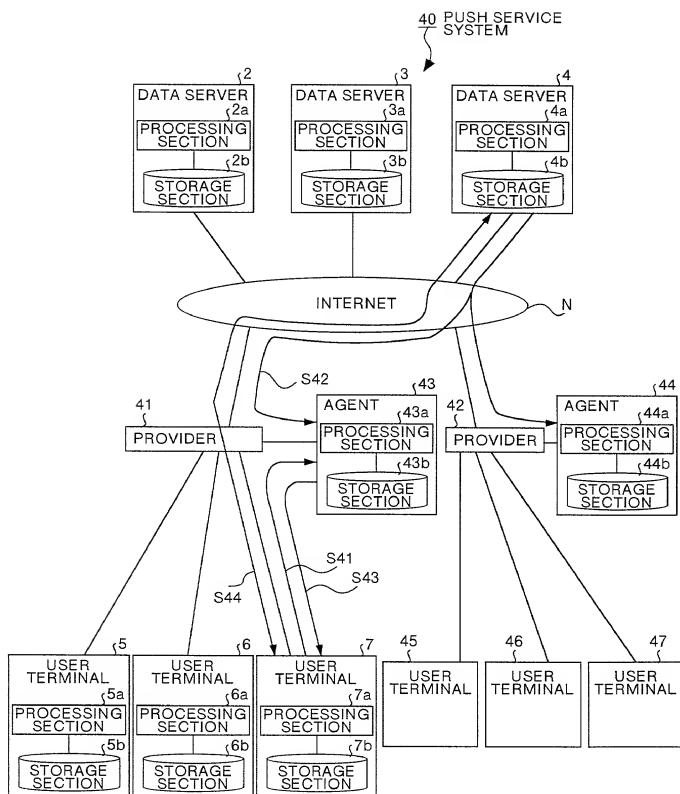


FIG.14

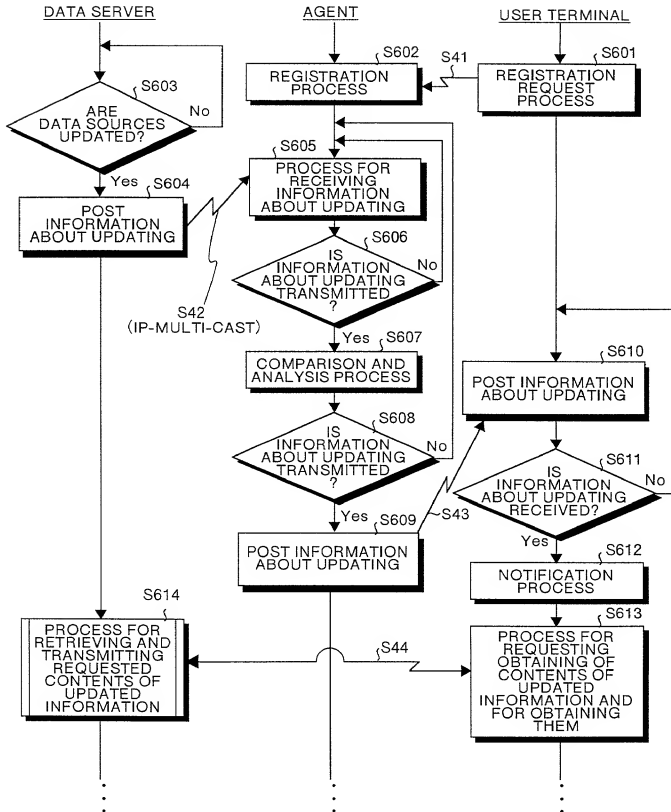


FIG.15

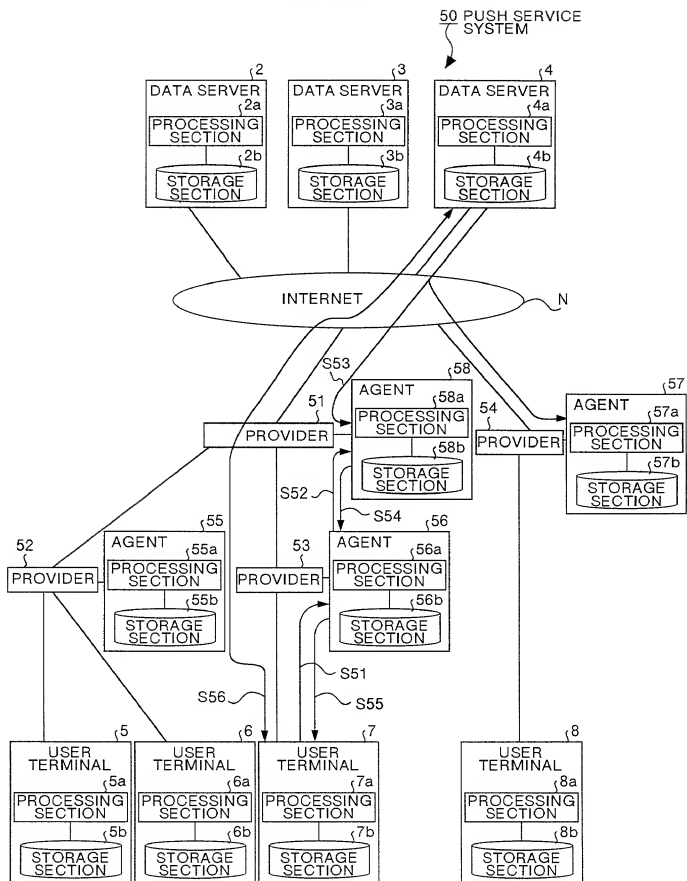


FIG.16

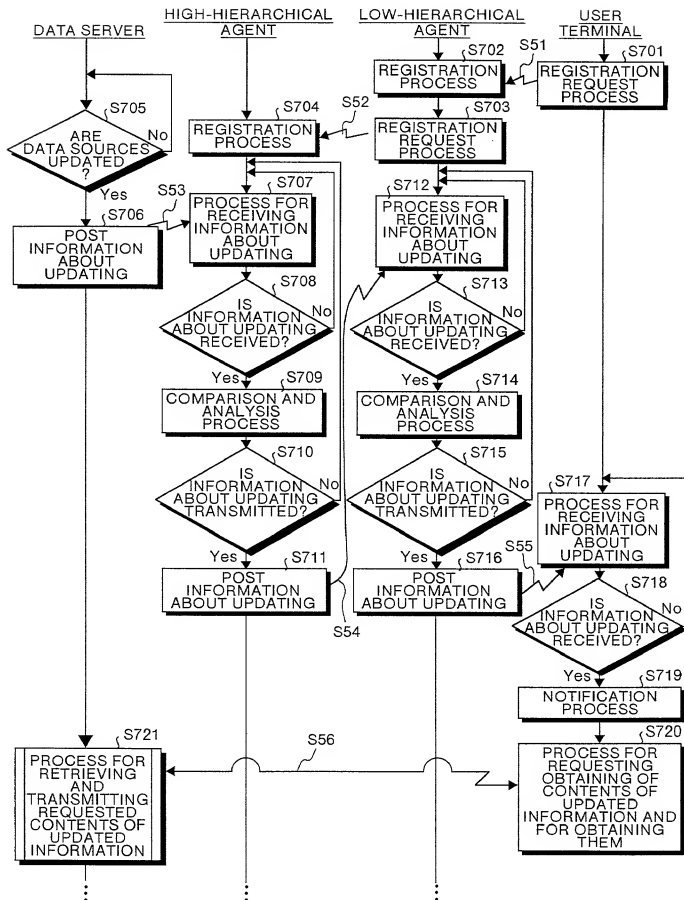


FIG.17


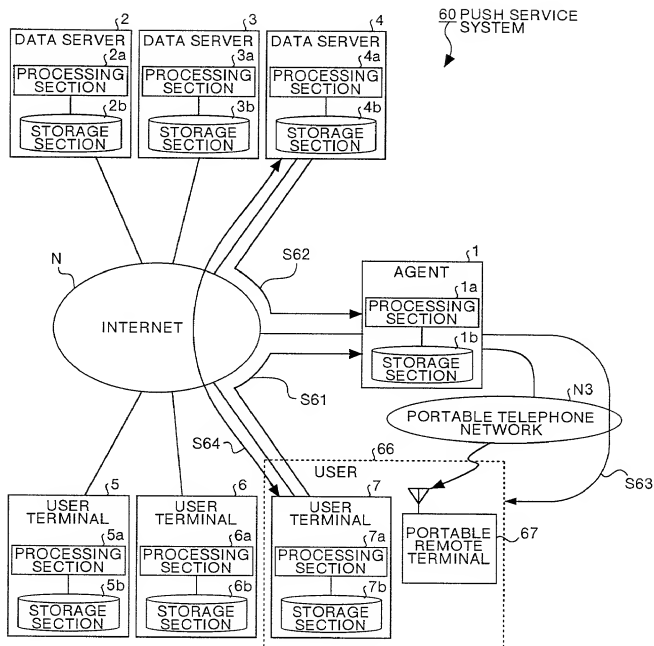


FIG.18

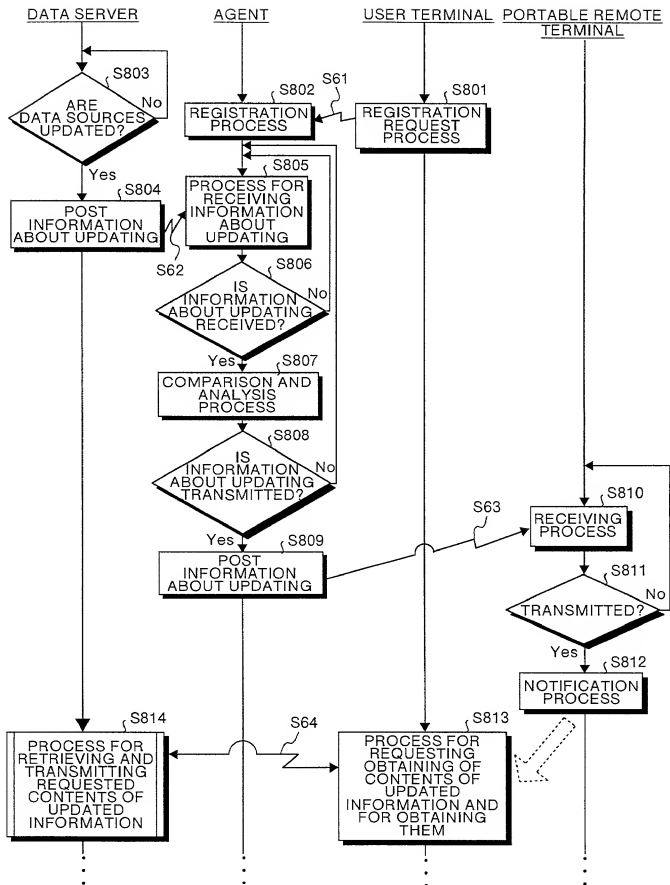

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名を発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

PUSH SERVICE SYSTEM AND PUSH

SERVICE PROCESSING METHOD

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、通商規則第37編第1条56項に定義されたとおり、特許資格の有無について重要な開示を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国特許法第35編119条(a)-(d)項又は365条(b)項に基づき、本国以外の国の少なくとも一ヶ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願
11-310254

(Number)
(番号)

Japan

(Country)
(国名)

29/Oct./1999

(Day/Month/Year Filled)
(出願年月日)

Priority Not Claimed

優先権主張なし

(Number)
(番号)

(Country)
(国名)

(Day/Month/Year Filled)
(出願年月日)

例: 第35編米国特許法119条(a)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国特許法第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)項に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国特許法第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願提出日以降で本出願の日本国内または特許協力条約国際提出日までの期間中に入手された、通常規則特許法第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(状況: 特許許可済、出願中、放棄済)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(状況: 特許許可済、出願中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行う宣言が真実であり、かつ私の入手した情報と私の信じているところに基づき、本明が全て真実であると信じていること、さらに仮に仮にされた虚偽の表明及びそれと同等の行為が米国特許法第18編1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような仮にによる虚偽の表明を行なえば、出願した、又は仮に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed.

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of application.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1996, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration

(日本語宣言書)

条約状: 私は下記の発明者として、本出願に関する一切の
手続を米特許商標局に対して遂行する弁理士または代理人
として、下記の者を指名いたします。(弁理士、または代理
士氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
the following attorney(s) and/or agent(s) to prosecute this
application and transact all business in the Patent and Trademark
Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358;
William F. Herbert, 31,024; Richard A. Golhofer, 31,106; Mark J. Henry, 35,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul
I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938;
Michael C. Soldner, P-41,455 and William M. Schertler, 35,348 (agent)

書類送付先

Send Correspondence to:

STAAS & HALSEY
700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
(202) 434-1500

唯一または第一発明者名	Full name of sole or first inventor	
Hiroshi IKEDA		
発明者の署名	日付	Inventor's signature Date
		<i>Hiroshi Ikeda</i> July 11, 2000
住所	Residence	
	Kanagawa, Japan	
国籍	Citizenship	
	Japanese	
私書箱	Post Office Address	
	c/o FUJITSU LIMITED 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588 Japan	
第二共同発明者	Full name of second joint inventor, if any	
第二共同発明者	日付	Second inventor's signature Date
住所	Residence	
国籍	Citizenship	
私書箱	Post Office Address	

(第三以降の共同発明者についても同様に記載し、署名をす
ること)

(Supply similar information and signature for third and subsequent
joint inventors.)